

Round flow cassette Air Conditioning Technical Data FXFQ-B



FXFQ20BVEB
FXFQ25BVEB
FXFQ32BVEB
FXFQ40BVEB
FXFQ50BVEB
FXFQ63BVEB
FXFQ80BVEB
FXFQ100BVEB
FXFQ125BVEB

Table of contents

FXFQ-B

1	Features	4
	FXFQ-B	4
2	Specifications	5
3	Electrical data	8
4	Safety device settings	9
5	Options	10
6	Capacity tables	11
	Cooling Capacity Tables	11
	Heating Capacity Tables	12
7	Dimensional drawings	13
	Dimensional Drawings with Accessories	13
	Dimensional Drawings with Fresh Air Intake	16
8	Centre of gravity	17
9	Piping diagrams	18
10	Wiring diagrams	19
	Wiring Diagrams - Single Phase	19
11	Sound data	20
	Sound Pressure Spectrum	20
12	Air flow patterns	25
	Air flow pattern - Cooling and Heating	25

1 Features

1 - 1 FXFQ-B

360° air discharge for optimum efficiency and comfort

1

- › Optional automatic filter cleaning panel results in higher efficiency & comfort and lower maintenance costs.
- › Two optional intelligent sensors improve energy efficiency and comfort
- › Widest choice ever in decoration panels: designer panels in white (RAL9010) and black (RAL9005) and standard panels in white (RAL9010) with grey louvers or full white
- › Bigger flaps and unique swing pattern improve equal air distribution
- › Individual flap control: flexibility to suit every room layout without changing the location of the unit!
- › Lowest installation height in the market: 214mm for class 20-63
- › Optional fresh air intake
- › Branch duct discharge allows to optimize air distribution in irregular shaped rooms or to supply air to small adjacent rooms
- › Standard drain pump with 675mm lift increases flexibility and installation speed



Inverter



Presence & floor sensor



Home leave operation



Fan only



Auto-cleaning filter



Draught prevention



Auto cooling-heating changeover



Whisper quiet



Ceiling soiling prevention



Individual flap control



Vertical auto swing



Fan speed steps



Dry programme



Air filter



Weekly timer



Infrared remote control



Wired remote control



Centralised control



Auto-restart



Self diagnosis



Multi tenant



Drain pump kit

2 Specifications

1 - 1 FXFQ-B

Technical specifications					FXFQ20B	FXFQ25B	FXFQ32B	FXFQ40B	FXFQ50B
Cooling capacity	Sensible capacity	At high fan speed	kW	1.80	2.10	2.80	3.40	4.10	
	Latent capacity	At high fan speed	kW	0.400	0.700	0.800	1.10	1.50	
	Total capacity	At high fan speed	kW	2.20	2.80	3.60	4.50	5.60	
Heating capacity	Total capacity	At high fan speed	kW	2.50	3.20	4.00	5.00	6.30	
Power input - 50Hz	Cooling	At high fan speed	kW	0.040				0.050	
	Heating	At high fan speed	kW	0.040				0.050	
Power input - 60Hz	Cooling	At high fan speed	kW	0.04				0.05	
	Heating	At high fan speed	kW	0.04				0.05	
Dimensions	Unit	Height	mm	204					
		Width	mm	840					
		Depth	mm	840					
	Packed unit	Height	mm	220					
		Width	mm	880					
		Depth	mm	880					
Weight	Unit	kg	18.0				19.0	21.0	
	Packed unit	kg	21				22	24	
Casing	Material			Galvanised steel plate					
Heat exchanger	Inside length		mm	2,134				2,090	
	Outside length		mm	2,181				2,184	
	Rows	Quantity		2				3	
	Fin pitch		mm	1.20					
	Passes	Quantity		4			6	12	
	Face area		m²	0.278			0.366	0.371	
	Stages	Quantity		9			12		
	Tube type			Ø5 HI-XA					
	Fin Type			Cross fin coil (Multi slit fins and Ø5HI-XA tubes)					
	Fan	Type			Turbo fan				
Quantity			1						
Air flow rate - 50Hz		Cooling	At high fan speed	m³/min	12.8			14.8	15.1
			At medium fan speed	m³/min	10.7			12.6	12.9
			At low fan speed	m³/min	8.9			10.4	10.7
		Heating	At high fan speed	m³/min	12.8			14.8	15.1
			At medium fan speed	m³/min	10.7			12.6	12.9
			At low fan speed	m³/min	8.9			10.4	10.7
Sound power level	Cooling	At high fan speed	dBA	49.0			51.0		
Sound pressure level	Cooling	At high fan speed	dBA	31.0			33.0		
Sound pressure level	Cooling	At medium fan speed	dBA	29.0			31.0		
		At low fan speed	dBA	28.0			29.0		
	Heating	At high fan speed	dBA	31.0			33.0		
		At medium fan speed	dBA	29.0			31.0		
		At low fan speed	dBA	28.0			29.0		
Fan motor	Quantity			1					
	Model			DFB05A2VB					
	Speed Steps			5					
Refrigerant	Type			R-410A					
	GWP			2,087.5					
Piping connections	Liquid	Type		Flare connection					
		OD	mm	6.35					
	Gas	Type		Flare connection					
		OD	mm	12.7					
	Drain			VP25 (O.D. 32 / I.D. 25)					
	Heat insulation			Foamed polystyrene / Foamed polyethylene					
Sound absorbing insulation			Foamed polyurethane						
Decoration panel	Model			BYCQ140E2W1 / BYCQ140E2W1W / BYCQ140E2W1B					
	Dimensions	Height	mm	65					
		Width	mm	950					
		Depth	mm	950					
	Weight			5.5					
Decoration panel 2	Model			BYCQ140E2GFW1 / BYCQ140E2GFW1B					
	Dimensions	Height	mm	148					
		Width	mm	950					
		Depth	mm	950					
	Weight			10.3					

2 Specifications

1 - 1 FXFQ-B

2

Technical specifications				FXFQ20B	FXFQ25B	FXFQ32B	FXFQ40B	FXFQ50B
Decoration panel 3	Model			BYCQ140E2P / BYCQ140E2PB				
	Dimensions	Height	mm	106				
		Width	mm	950				
		Depth	mm	950				
		Weight	kg	6.5				
Air filter	Type			Resin net				
Safety devices	Item	01		Fan motor overcurrent protector				
Control systems	Infrared remote control			BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB				
	Wired remote control			BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52				

Technical specifications					FXFQ63B	FXFQ80B	FXFQ100B	FXFQ125B	
Cooling capacity	Sensible capacity	At high fan speed	kW	5.20		6.50	7.80	9.80	
	Latent capacity	At high fan speed	kW	1.90		2.50	3.40	4.20	
	Total capacity	At high fan speed	kW	7.10		9.00	11.20	14.00	
Heating capacity	Total capacity	At high fan speed	kW	8.00		10.0	12.5	16.0	
Power input - 50Hz	Cooling	At high fan speed	kW	0.060		0.090	0.120	0.190	
	Heating	At high fan speed	kW	0.060		0.090	0.120	0.190	
Power input - 60Hz	Cooling	At high fan speed	kW	0.06		0.09	0.12	0.19	
	Heating	At high fan speed	kW	0.06		0.09	0.12	0.19	
Dimensions	Unit	Height	mm	204		246		288	
		Width	mm	840					
		Depth	mm	840					
	Packed unit	Height	mm	220	260		300		
		Width	mm	880					
		Depth	mm	880					
Weight	Unit	kg		21.0	24.0		26.0		
	Packed unit	kg		24	27		29		
Casing	Material			Galvanised steel plate					
Heat exchanger	Inside length			mm	2,090				
	Outside length			mm	2,184				
	Rows	Quantity		3					
	Fin pitch			mm	1.20				
	Passes	Quantity		12	14		17		
	Face area			m²	0.371		0.464		
	Stages	Quantity		12	15		18		
	Tube type			Ø5 HI-XA					
	Fin	Type		Cross fin coil (Multi slit fins and Ø5HI-XA tubes)					
Fan	Type				Turbo fan				
	Quantity				1				
	Air flow rate - 50Hz	Cooling	At high fan speed	m³/min	16.6	23.3	27.8	31.6	
			At medium fan speed	m³/min	13.4	19.2	20.4	26.0	
			At low fan speed	m³/min	10.7	13.5	13.0	19.8	
		Heating	At high fan speed	m³/min	16.6	22.5	27.8	30.3	
			At medium fan speed	m³/min	13.4	18.5	20.4	24.9	
			At low fan speed	m³/min	10.7	13.0		18.9	
Sound power level	Cooling	At high fan speed	dB(A)	53.0	55.0	60.0	61.0		
Sound pressure level	Cooling	At high fan speed	dB(A)	35.0	38.0	43.0	45.0		
Sound pressure level	Cooling	At medium fan speed	dB(A)	33.0	34.0	37.0	41.0		
		At low fan speed	dB(A)		30.0		36.0		
	Heating	At high fan speed	dB(A)	35.0	38.0	43.0	45.0		
		At medium fan speed	dB(A)	33.0	34.0	37.0	41.0		
		At low fan speed	dB(A)		30.0		36.0		
Fan motor	Quantity				1				
	Model				DFB05A2VB	DFB11A2VB			
	Speed	Steps				5			
	Output	Max	W			-	106		
Refrigerant	Type				R-410A				
	GWP				2,087.5				

2 Specifications

1 - 1 FXFQ-B

Technical specifications			FXFQ63B	FXFQ80B	FXFQ100B	FXFQ125B
Piping connections	Liquid	Type	Flare connection			
		OD	9.52			
	Gas	Type	Flare connection			
		OD	15.9			
	Drain		VP25 (O.D. 32 / I.D. 25)			
	Heat insulation		Foamed polystyrene / Foamed polyethylene			
Decoration panel	Sound absorbing insulation		Foamed polyurethane			
	Model		BYCQ140E2W1 / BYCQ140E2W1W / BYCQ140E2W1B			
	Dimensions	Height	65			
		Width	950			
		Depth	950			
	Weight		5.5			
Decoration panel 2	Model		BYCQ140E2GFW1 / BYCQ140E2GFW1B			
	Dimensions	Height	148			
		Width	950			
		Depth	950			
	Weight		10.3			
Decoration panel 3	Model		BYCQ140E2P / BYCQ140E2PB			
	Dimensions	Height	106			
		Width	950			
		Depth	950			
	Weight		6.5			
Air filter		Type	Resin net			
Safety devices		Item 01	Fan motor overcurrent protector			
Control systems	Infrared remote control		BRC7FA532F / BRC7FB532F / BRC7FA532FB / BRC7FB532FB			
	Wired remote control		BRC1H52W/S/K / BRC1E53A / BRC1E53B / BRC1E53C / BRC1D52			

Standard accessories: Operation manual; Quantity: 1;

Standard accessories: Installation manual; Quantity: 1;

Standard accessories: Drain hose; Quantity: 1;

Standard accessories: Clamp for drain hose; Quantity: 1;

Standard accessories: Washer for hanger bracket; Quantity: 8;

Standard accessories: Screws; Quantity: 4;

Standard accessories: Installation guide; Quantity: 1;

Standard accessories: Insulation for fitting; Quantity: 2;

Standard accessories: Sealing pads; Quantity: 1;

Standard accessories: Wire clamp material; Quantity: 7;

Standard accessories: Clamps; Quantity: 1;

Electrical specifications			FXFQ20B	FXFQ25B	FXFQ32B	FXFQ40B	FXFQ50B
Power supply	Phase		1~				
	Frequency		50/60				
	Voltage		220-240/220				

Electrical specifications			FXFQ63B	FXFQ80B	FXFQ100B	FXFQ125B
Power supply	Phase		1~			
	Frequency		50/60			
	Voltage		220-240/220			

Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB |

Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB |

The BYCQ140E2W1W has white insulations. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140E2W1W decoration panel in environments exposed to concentrations of dirt. |

The sound power level is an absolute value indicating the power which a sound source generates. |

Voltage range: units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits. |

Maximum allowable voltage range variation between phases is 2%. |

Contains fluorinated greenhouse gases |

BYCQ140E2W1: pure white standard panel with grey louvers; BYCQ140E2W1W: pure white standard panel with white louvers; BYCQ140E2W1B: black standard panel with black louvers.

3 Electrical data

3 - 1 Electrical Data

FXFQ-B

Model name	Power supply					IFM	Power input [W]	
Indoor unit	Hz	Voltage	Voltage range	MCA	MFA	FLA	Cooling	Heating
FXFQ20BVEB	50	220-240	MAX. 50Hz 264V MIN. 50Hz 198V	0,3	16	0,2	38	35
FXFQ25BVEB		220-240		0,3	16	0,2	38	35
FXFQ32BVEB		220-240		0,3	16	0,2	38	35
FXFQ40BVEB		220-240		0,3	16	0,2	38	35
FXFQ50BVEB		220-240		0,4	16	0,3	53	50
FXFQ63BVEB		220-240		0,4	16	0,3	61	58
FXFQ80BVEB		220-240		0,6	16	0,5	92	89
FXFQ100BVEB		220-240		0,8	16	0,6	115	112
FXFQ125BVEB		220-240		1,3	16	1,0	186	183
FXFQ20BVEB	60	220	MAX. 60Hz 242V MIN. 60Hz 198V	0,3	16	0,2	38	35
FXFQ25BVEB		220		0,3	16	0,2	38	35
FXFQ32BVEB		220		0,3	16	0,2	38	35
FXFQ40BVEB		220		0,3	16	0,2	38	35
FXFQ50BVEB		220		0,4	16	0,3	53	50
FXFQ63BVEB		220		0,4	16	0,3	61	58
FXFQ80BVEB		220		0,6	16	0,5	92	89
FXFQ100BVEB		220		0,8	16	0,6	115	112
FXFQ125BVEB		220		1,3	16	1,0	186	183

Symbols

MCA: Minimum Circuit Ampere [A]
MFA: Maximum Fuse Ampere [A]
IFM: Indoor fan motor
FLA: Full Load Ampere [A]

Notes

1) Voltage range

The units are suitable for use with electrical systems in which the voltage supplied to the unit terminals is not below or above the listed range limits.

2) Use a circuit breaker instead of a fuse.

3) Select the wire size according to the MCA.

4) The maximum allowable voltage that is unbalanced between phases is ·2·%.

5) MCA/MFA

$MCA = 1.25 \times FLA$

$MFA \leq 4 \times FLA$

The next lower standard fuse rating is minimum ·16· ampere.

3D121719

4 Safety device settings

4 - 1 Safety Device Settings

FXFQ-B

Safety devices		FXFQ20-63BVEB FXFA20-63A2VEB	FXFQ80-125BVEB FXFA80-125A2VEB
PCB fuse		250V, 3.15A	250V, 3.15A
Fan motor overcurrent protection	Nominal	0,92A	1,49A
Fan motor thermal protector	Maximum	---	---
Drain pump fuse		---	---

4D121692A

Options

Options

FXFQ-B

Option kit	Product name	Availability	
		FCAG35-140BVEB FCAHG71-140HVEB	FXFQ20-125BVEB
Standard	BYCQ140E2W1	✓	✓
White	BYCQ140E2W1W ②	✓	✓
Black	BYCQ140E2W1B	✓	✓
Designer decoration panel	BYCQ140E2P	✓	✓
Designer decoration panel Black	BYCQ140E2PB	✓	✓
Self-cleaning decoration panel (with fine filter)	BYCQ140E2GFW1 ③④⑤	✓	✓
Self-cleaning decoration panel (with fine filter) Black	BYCQ140E2GFW1B ③④⑤	✓	✓
Long-life replacement filter	KAF551D160	✓	✓
Chamber [part of fresh air intake kit (20% fresh air)]	KDDP55C160-1 ⑥⑦	✓	✓
Diffuser from chamber to duct [part of fresh air intake kit (20% fresh air)]	KDDP55D160-2 ⑥⑦	✓	✓
Air discharge outlet sealing member	KDBHQ56B140 ⑥	✓	✓
Sensor kit	BRVQ140B8 ⑧	✓	✓
Sensor kit Black	BRVQ140B8B ⑧	✓	✓
Sensor kit (for designer decoration panel)	BRVQ140C8 ⑨	✓	✓
Sensor kit (for designer decoration panel) Black	BRVQ140C8B ⑨	✓	✓
Extension wire harness	EWHR1 ⑩	✓	✓
Wireless remote control	BRC7FAS32F ⑥⑩⑪	✓	✓
Wireless remote control Black	BRC7FAS32FB ⑥⑩⑪⑫	✓	✓
Wireless remote control (for designer decoration panel)	BRC7FBS32F ⑥⑪⑫	✓	✓
Wireless remote control (for designer decoration panel) Black	BRC7FBS32FB ⑥⑪⑫⑬	✓	✓
Wired remote control	BRC10528 ⑩⑫	✓	✓
Wired remote control	BRC1H81W/S7	✓	✓
Wired remote control	BRC1E53A7 ⑬, BRC1E53B7 ⑭, BRC1E53C7 ⑮⑯, BRC1H51⑨W/K/S7	✓	✓
Simplified remote control (with operation mode selector button)	BRC3E52C7 ⑮⑰⑱	✓	✓
Simplified remote control (without operation mode selector button)	BRC3E52C7 ⑮⑰⑱	✓	✓
Wiring adaptor for electrical appendices -1	KRP18A58 ⑥⑰	✓	✓
Wiring adaptor for electrical appendices -2	KRP4A53 ⑥⑰⑱	✓	✓
Wiring adaptor (hour meter)	KRP1C12 ⑥⑰	✓	✓
Remote sensor	KRCS01-7B	✓	✓
Installation box for adaptor PCB	KRP1H98A ⑥	✓	✓
Central remote control	DCS302C51	✓	✓
Unified ON/OFF controller	DCS301B51	✓	✓
Electrical box with earth terminal (2: blocks)	KJB212AA	✓	✓
Electrical box with earth terminal (3: blocks)	KJB311AA	✓	✓
Schedule timer	DST301BA51	✓	✓
PCB for multi-tenant indoor units	DTA114A61	✓	✓
Touch Controller	DCS601C51	✓	✓
Digital input adaptor	BRP7A53 ⑩	✓	✓
Wi-Fi adaptor for smartphones	BRP069B82 ⑰⑱⑲	✓	✓
Intelligent Touch Manager	DCM601A51	✓	✓
Intelligent Tablet Controller	DCC601A51	✓	✓
Wire harness for external wireless temperature sensor	EKEWTSC-2 ⑳	✓	✓

For notes and symbols, refer to page -2-.

3D121704D

FXFQ-B

Notes

- ① All options are kits
- ② This option has white insulation.
Be aware that dirt formation is more easily visible on white insulation.
It is recommended not to install this option in environments with a high concentration of dirt.
- ③ To be able to control option -BYCQ140E2GFW1 / BYCQ140E2GFW1B-, controller -BRC1E / BRC1H- is required.
- ④ This option cannot be combined with -multi and non-inverter split outdoor units-.
- ⑤ This option is suitable for all applications, except for use in environments that are greasy, or have high humidity.
- ⑥ This option cannot be combined with -BYCQ140E2GFW1 / BYCQ140E2GFW1B-.
- ⑦ Both parts of the fresh air intake kit are required for each unit.
- ⑧ Only possible in combination with -BYCQ140E2W1 / BYCQ140E2W1W / BYCQ140E2GFW1-.
- ⑨ Only possible in combination with -BYCQ140E2W1B / BYCQ140E2GFW1B-.
- ⑩ Only possible in combination with -BYCQ140E2W1 / BYCQ140E2W1W-.
- ⑪ Only possible in combination with -BYCQ140E2W1B-.
- ⑫ Not recommended because of its limited functionality.
- ⑬ Included languages are: English, German, French, Italian, Spanish, Portuguese, and Dutch.
- ⑭ Included languages are: English, Czech, Croatian, Hungarian, Slovenian, Romanian, and Bulgarian.
- ⑮ Included languages are: English, Russian, Greek, Turkish, Polish, Albanian, and Slovak.
- ⑯ Language pack -3- of controller -BRC1E53C7- is different from that of controller -BRC2/3E52C7-.
- ⑰ Included languages are:
Language pack -1-: English, German, French, Dutch, Spanish, Italian, and Portuguese.
With PC cable -EKPCAB3- in combination with the Updater PC software, you can additionally change the language to:
Language pack -2-: English, Bulgarian, Croatian, Czech, Hungarian, Romanian, and Slovenian.
Language pack -3-: English, Greek, Polish, Russian, Serbian, Slovak, and Turkish.
- ⑱ Requires installation box for adaptor PCB -KRP1H98A-.
- ⑲ This option cannot be combined with -BRP069B82-.
- ⑳ Only possible in combination with remote control -BRC2/3E52C7, BRC1E53A/B/C7, BRC1H51⑨W/K/S7, BRC1H81W/S7-.
- ㉑ Only possible in combination with wired or wireless remote control (e.g. -BRC1E, BRC1H, BRC7F-).
- ㉒ When combining the Wi-Fi adaptor (-BRP069B82) with a self-cleaning decoration panel (-BYCQ140E2GFW1 / BYCQ140E2GFW1B-), option -EWHR1- is required.
- ㉓ This option cannot be combined with -KRP4A53-.
- ㉔ Only possible in combination with -BYCQ140E2P-.
- ㉕ Only possible in combination with -BYCQ140E2PB-.
- ㉖ The active airflow circulation function is not available for this controller.
- ㉗ -EKEWTSC-2- is a wire harness for the connection of option -K.RSS-.
-K.RSS- is not an official option. Sales for this option are an SBU responsibility.

3D121704D

Capacity tables

6 - 1 Cooling Capacity Tables

FXFQ-B

Unit size		Indoor air temp.													
		14.0WB		16.0WB		18.0WB		19.0WB		20.0WB		22.0WB		24.0WB	
		20.0DB		23.0DB		26.0DB		27.0DB		28.0DB		30.0DB		32.0DB	
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC
20	10.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.6	1.9	2.9	1.9
	12.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.6	1.9	2.9	1.9
	14.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.6	1.9	2.8	1.8
	16.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.6	1.9	2.8	1.8
	18.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.6	1.9	2.7	1.8
	20.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.6	1.9	2.7	1.8
	21.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.6	1.9	2.7	1.8
	23.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.6	1.9	2.6	1.7
	25.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.6	1.9	2.6	1.7
	27.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.5	1.8	2.6	1.7
	29.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.5	1.8	2.5	1.7
	31.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.4	1.8	2.5	1.7
	33.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.4	1.7	2.5	1.7
	35.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.8	2.3	1.8	2.4	1.7	2.4	1.7
	37.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.7	2.3	1.8	2.3	1.8	2.4	1.7
	39.0	1.5	1.4	1.8	1.6	2.1	1.7	2.2	1.7	2.2	1.8	2.3	1.7	2.3	1.7
25	10.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.2	3.7	2.3
	12.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.2	3.6	2.3
	14.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.2	3.6	2.2
	16.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.2	3.5	2.2
	18.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.2	3.5	2.2
	20.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.2	3.4	2.1
	21.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.4	2.2	3.4	2.1
	23.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.3	2.2	3.4	2.1
	25.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.3	2.2	3.3	2.1
	27.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.2	2.1	3.3	2.1
	29.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.2	2.1	3.2	2.0
	31.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.1	2.1	3.2	2.1
	33.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.1	2.1	3.1	2.0
	35.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	3.0	2.2	3.0	2.1	3.1	2.0
	37.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	2.9	2.2	3.0	2.1	3.0	2.0
	39.0	1.9	1.7	2.3	1.9	2.6	2.0	2.8	2.1	2.9	2.2	2.9	2.0	3.0	2.0
32	10.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.3	2.9	4.7	2.9
	12.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.3	2.9	4.7	2.9
	14.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.3	2.9	4.6	2.9
	16.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.3	2.9	4.6	2.8
	18.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.3	2.9	4.5	2.8
	20.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.3	2.9	4.4	2.7
	21.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.3	2.9	4.4	2.7
	23.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.2	2.8	4.3	2.7
	25.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.2	2.8	4.3	2.7
	27.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.1	2.8	4.2	2.6
	29.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.1	2.8	4.2	2.6
	31.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	4.0	2.7	4.1	2.6
	33.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	3.9	2.7	4.0	2.6
	35.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.8	2.9	3.9	2.7	4.0	2.6
	37.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.8	3.7	2.8	3.8	2.7	3.9	2.6
	39.0	2.4	2.3	2.9	2.6	3.4	2.8	3.6	2.9	3.7	2.8	3.8	2.6	3.8	2.6
40	10.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.4	3.2	5.9	3.5
	12.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.4	3.2	5.8	3.5
	14.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.4	3.2	5.8	3.5
	16.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.4	3.2	5.7	3.4
	18.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.4	3.2	5.6	3.4
	20.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.4	3.2	5.5	3.4
	21.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.4	3.2	5.5	3.3
	23.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.3	3.2	5.4	3.3
	25.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.2	3.2	5.3	3.3
	27.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.2	3.1	5.3	3.3
	29.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.1	3.1	5.2	3.2
	31.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	5.0	3.1	5.1	3.2
	33.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.8	3.5	4.9	3.0	5.0	3.2
	35.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.7	3.5	4.9	3.0	5.0	3.1
	37.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.7	3.5	4.8	3.0	4.9	3.1
	39.0	3.0	2.8	3.6	3.0	4.2	3.3	4.5	3.4	4.6	3.4	4.7	3.0	4.8	3.1
50	10.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	3.9	7.4	4.3
	12.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	3.9	7.3	4.3
	14.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	3.9	7.2	4.3
	16.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	3.9	7.1	4.2
	18.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	3.9	7.0	4.2
	20.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	3.9	6.9	4.1
	21.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.7	3.9	6.8	4.1
	23.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.6	3.9	6.7	4.1
	25.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.5	3.9	6.6	4.0
	27.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.4	3.8	6.6	4.0
	29.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.3	3.8	6.5	3.9
	31.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.2	3.8	6.4	3.9
	33.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	6.0	4.2	6.1	3.7	6.3	3.9
	35.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	5.9	4.2	6.0	3.7	6.2	3.8
	37.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	5.8	4.2	5.9	3.6	6.1	3.8
	39.0	3.8	3.2	4.5	3.6	5.2	4.0	5.6	4.1	5.7	4.1	5.8	3.6	6.0	3.7

TC: Total Capacity (kW); SHC: Sensible heat capacity (kW)

Unit size		Indoor air temp.															
		14.0WB		16.0WB		18.0WB		19.0WB		20.0WB		22.0WB		24.0WB			
		20.0DB		23.0DB		26.0DB		27.0DB		28.0DB		30.0DB		32.0DB			
		TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC	TC	SHC		
63	10.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.6	5.3	8.5	5.5	9.0	5.3		
	12.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.6	5.3	8.5	5.5	8.9	5.3		
	14.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.6	5.3	8.5	5.5	8.7	5.2		
	16.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.6	5.3	8.5	5.5	8.6	5.1		
	18.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.6	5.3	8.3	5.4	8.5	5.1		
	20.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.6	5.3	8.2	5.3	8.4	5.0		
	21.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.6	5.3	8.2	5.3	8.3	5.0		
	23.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.6	5.3	8.1	5.2	8.2	4.9		
	25.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.6	5.3	7.9	5.1	8.1	4.9		
	27.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.6	5.3	7.8	5.1	8.0	4.8		
	29.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.5	5.3	7.7	5.0	7.9	4.8		
	31.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.4	5.2	7.6	4.9	7.8	4.7		
	33.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.3	5.1	7.5	4.9	7.6	4.7		
	35.0	4.8	4.0	5.7	4.6	6.6	5.1	7.1	5.2	7.2	5.1	7.4	4.8	7.5	4.6		
	37.0	4.8	4.0	5.7	4.6	6.6	5.1	7.0	5.1	7.1	5.0	7.2	4.8	7.4	4.6		
	39.0	4.8	4.0	5.7	4.6	6.6	5.1	6.9	5.1	7.0	5.0	7.1	4.8	7.3	4.6		
80	10.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.8	6.9	11.8	7.1		
	12.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.8	6.9	11.7	7.0		
	14.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.8	6.9	11.5	6.9		
	16.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.8	6.9	11.4	6.8		
	18.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.8	6.9	11.2	6.7		
	20.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.8	6.9	11.1	6.6		
	21.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.8	6.9	11.0	6.6		
	23.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.6	6.8	10.8	6.4		
	25.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.5	6.7	10.7	6.4		
	27.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.3	6.6	10.5	6.3		
	29.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.2	6.5	10.4	6.2		
	31.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	10.0	6.5	10.2	6.2		
	33.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.6	6.7	9.8	6.4	10.1	6.2		
	35.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.5	6.6	9.7	6.4	9.9	6.1		
	37.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.5	9.3	6.5	9.5	6.3	9.8	6.0		
	39.0	6.1	5.2	7.2	5.8	8.4	6.4	9.0	6.6	9.2	6.5	9.4	6.2	9.6	6.0		
100	10.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	13.4	8.3	14.7	8.5		
	12.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	13.4	8.3	14.5	8.3		
	14.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	13.4	8.3	14.4	8.3		
	16.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	13.4	8.3	14.2	8.1		
	18.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	13.4	8.3	14.0	8.0		
	20.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	13.4	8.3	13.8	7.9		
	21.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	13.4	8.3	13.7	7.9		
	23.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	13.2	8.2	13.5	7.8		
	25.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	13.0	8.1	13.3	7.7		
	27.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	12.8	8.0	13.1	7.6		
	29.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	12.6	7.9	12.9	7.5		
	31.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	12.4	7.8	12.7	7.4		
	33.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.9	8.0	12.2	7.7	12.5	7.4		
	35.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.8	7.9	12.1	7.6	12.3	7.3		
	37.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.8	11.6	7.8	11.9	7.5	12.2	7.2		
	39.0	7.6	6.2	9.0	6.9	10.5	7.7	11.2	7.9	11.4	7.7	11.7	7.5	12.0	7.2		
125	10.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	16.8	10.5	18.4	10.9		
	12.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	16.8	10.5	18.2	10.7		
	14.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	16.8	10.5	18.0	10.6		
	16.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	16.8	10.5	17.7	10.4		
	18.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	16.8	10.5	17.5	10.3		
	20.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	16.8	10.5	17.2	10.2		
	21.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	16.8	10.5	17.1	10.1		
	23.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	16.5	10.3	16.9	9.9		
	25.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	16.3	10.2	16.6	9.8		
	27.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	16.1	10.0	16.4	9.7		
	29.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	15.8	9.8	16.2	9.6		
	31.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	15.6	9.8	15.9	9.4		
	33.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.9	9.9	15.3	9.6	15.7	9.2		
	35.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.8	9.8	15.1	9.5	15.4	9.1		
	37.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.5	9.7	14.9	9.4	15.2	9.0		
	39.0	9.5	7.7	11.3	8.6	13.1	9.6	14.0	9.8	14.3	9.5	14.6	9.2	15.0	8.9		

Capacity tables

6 - 2 Heating Capacity Tables

6

FXFQ-B

Unit size	Outdoor air temp.		Indoor air temp.: °CDB					
			16.0	18.0	20.0	21.0	22.0	24.0
	°CDB	°CWB	kW	kW	kW	kW	kW	kW
20	-19.8	-20.0	1.5	1.5	1.5	1.5	1.5	1.5
	-18.8	-19.0	1.5	1.5	1.5	1.5	1.5	1.5
	-16.7	-17.0	1.6	1.6	1.6	1.6	1.6	1.6
	-14.7	-15.0	1.7	1.7	1.7	1.7	1.7	1.7
	-12.6	-13.0	1.8	1.8	1.8	1.8	1.8	1.8
	-10.5	-11.0	1.9	1.9	1.9	1.9	1.9	1.9
	-9.5	-10.0	1.9	1.9	1.9	1.9	1.9	1.9
	-8.5	-9.1	2.0	2.0	1.9	1.9	1.9	1.9
	-7.0	-7.6	2.0	2.0	2.0	2.0	2.0	2.0
	-5.0	-5.6	2.1	2.1	2.1	2.1	2.1	2.1
	-3.0	-3.7	2.2	2.2	2.2	2.2	2.2	2.2
	0.0	-0.7	2.3	2.3	2.3	2.3	2.3	2.2
	3.0	2.2	2.5	2.5	2.4	2.4	2.3	2.2
	5.0	4.1	2.5	2.5	2.5	2.4	2.3	2.2
	7.0	6.0	2.6	2.6	2.5	2.4	2.3	2.2
	9.0	7.9	2.7	2.7	2.5	2.4	2.3	2.2
	11.0	9.8	2.8	2.7	2.5	2.4	2.3	2.2
	13.0	11.8	2.8	2.7	2.5	2.4	2.3	2.2
	15.0	13.7	2.8	2.7	2.5	2.4	2.3	2.2
	-19.8	-20.0	1.9	1.9	1.9	1.9	1.9	1.9
25	-18.8	-19.0	1.9	1.9	1.9	1.9	1.9	1.9
	-16.7	-17.0	2.1	2.1	2.0	2.0	2.0	2.0
	-14.7	-15.0	2.2	2.2	2.2	2.2	2.2	2.1
	-12.6	-13.0	2.3	2.3	2.3	2.3	2.3	2.3
	-10.5	-11.0	2.4	2.4	2.4	2.4	2.4	2.4
	-9.5	-10.0	2.5	2.4	2.4	2.4	2.4	2.4
	-8.5	-9.1	2.5	2.5	2.5	2.5	2.5	2.5
	-7.0	-7.6	2.6	2.6	2.6	2.6	2.6	2.6
	-5.0	-5.6	2.7	2.7	2.7	2.7	2.7	2.7
	-3.0	-3.7	2.8	2.8	2.8	2.8	2.8	2.8
	0.0	-0.7	3.0	3.0	3.0	3.0	3.0	3.0
	3.0	2.2	3.1	3.1	3.1	3.1	3.0	2.8
	5.0	4.1	3.3	3.2	3.2	3.1	3.0	2.8
	7.0	6.0	3.4	3.4	3.2	3.1	3.0	2.8
	9.0	7.9	3.5	3.4	3.2	3.1	3.0	2.8
	11.0	9.8	3.6	3.4	3.2	3.1	3.0	2.8
	13.0	11.8	3.6	3.4	3.2	3.1	3.0	2.8
	15.0	13.7	3.6	3.4	3.2	3.1	3.0	2.8
	-19.8	-20.0	2.4	2.4	2.3	2.3	2.3	2.3
	-18.8	-19.0	2.4	2.4	2.4	2.4	2.4	2.4
32	-16.7	-17.0	2.6	2.6	2.6	2.6	2.6	2.5
	-14.7	-15.0	2.7	2.7	2.7	2.7	2.7	2.7
	-12.6	-13.0	2.9	2.8	2.8	2.8	2.8	2.8
	-10.5	-11.0	3.0	3.0	3.0	3.0	3.0	3.0
	-9.5	-10.0	3.1	3.1	3.1	3.1	3.0	3.0
	-8.5	-9.1	3.1	3.1	3.1	3.1	3.1	3.1
	-7.0	-7.6	3.2	3.2	3.2	3.2	3.2	3.2
	-5.0	-5.6	3.4	3.4	3.4	3.4	3.4	3.4
	-3.0	-3.7	3.5	3.5	3.5	3.5	3.5	3.5
	0.0	-0.7	3.7	3.7	3.7	3.7	3.7	3.5
	3.0	2.2	3.9	3.9	3.9	3.9	3.7	3.5
	5.0	4.1	4.1	4.1	4.0	3.9	3.7	3.5
	7.0	6.0	4.2	4.2	4.0	3.9	3.7	3.5
	9.0	7.9	4.3	4.3	4.0	3.9	3.7	3.5
	11.0	9.8	4.5	4.3	4.0	3.9	3.7	3.5
	13.0	11.8	4.5	4.3	4.0	3.9	3.7	3.5
	15.0	13.7	4.5	4.3	4.0	3.9	3.7	3.5
	-19.8	-20.0	3.0	2.9	2.9	2.9	2.9	2.9
	-18.8	-19.0	3.0	3.0	3.0	3.0	3.0	3.0
40	-16.7	-17.0	3.2	3.2	3.2	3.2	3.2	3.2
	-14.7	-15.0	3.4	3.4	3.4	3.4	3.4	3.4
	-12.6	-13.0	3.6	3.6	3.6	3.5	3.5	3.5
	-10.5	-11.0	3.7	3.7	3.7	3.7	3.7	3.7
	-9.5	-10.0	3.8	3.8	3.8	3.8	3.8	3.8
	-8.5	-9.1	3.9	3.9	3.9	3.9	3.9	3.9
	-7.0	-7.6	4.0	4.0	4.0	4.0	4.0	4.0
	-5.0	-5.6	4.2	4.2	4.2	4.2	4.2	4.2
	-3.0	-3.7	4.4	4.4	4.4	4.4	4.4	4.4
	0.0	-0.7	4.7	4.6	4.6	4.6	4.6	4.4
	3.0	2.2	4.9	4.9	4.9	4.8	4.7	4.4
	5.0	4.1	5.1	5.1	5.0	4.8	4.7	4.4
	7.0	6.0	5.2	5.2	5.0	4.8	4.7	4.4
	9.0	7.9	5.4	5.3	5.0	4.8	4.7	4.4
	11.0	9.8	5.6	5.3	5.0	4.8	4.7	4.4
	13.0	11.8	5.6	5.3	5.0	4.8	4.7	4.4
	15.0	13.7	5.6	5.3	5.0	4.8	4.7	4.4
	-19.8	-20.0	3.7	3.7	3.7	3.7	3.7	3.7
	-18.8	-19.0	3.8	3.8	3.8	3.8	3.8	3.8
50	-16.7	-17.0	4.1	4.0	4.0	4.0	4.0	4.0
	-14.7	-15.0	4.3	4.3	4.3	4.2	4.2	4.2
	-12.6	-13.0	4.5	4.5	4.5	4.5	4.5	4.5
	-10.5	-11.0	4.7	4.7	4.7	4.7	4.7	4.7
	-9.5	-10.0	4.8	4.8	4.8	4.8	4.8	4.8
	-8.5	-9.1	4.9	4.9	4.9	4.9	4.9	4.9
	-7.0	-7.6	5.1	5.1	5.1	5.1	5.1	5.1
	-5.0	-5.6	5.3	5.3	5.3	5.3	5.3	5.3
	-3.0	-3.7	5.5	5.5	5.5	5.5	5.5	5.5
	0.0	-0.7	5.9	5.9	5.8	5.8	5.8	5.5
	3.0	2.2	6.2	6.2	6.2	6.1	5.9	5.5
	5.0	4.1	6.4	6.4	6.3	6.1	5.9	5.5
	7.0	6.0	6.6	6.6	6.3	6.1	5.9	5.5
	9.0	7.9	6.8	6.7	6.3	6.1	5.9	5.5
	11.0	9.8	7.0	6.7	6.3	6.1	5.9	5.5
	13.0	11.8	7.1	6.7	6.3	6.1	5.9	5.5
	15.0	13.7	7.1	6.7	6.3	6.1	5.9	5.5

TC: Total Capacity (kW) ; SHC: Sensible heat capacity (kW)

Unit size	Outdoor air temp.		Indoor air temp.: °CDB					
			16.0	18.0	20.0	21.0	22.0	24.0
	°CDB	°CWB	kW	kW	kW	kW	kW	kW
63	-19.8	-20.0	4.7	4.7	4.7	4.7	4.7	4.7
	-18.8	-19.0	4.9	4.9	4.8	4.8	4.8	4.8
	-16.7	-17.0	5.1	5.1	5.1	5.1	5.1	5.1
	-14.7	-15.0	5.4	5.4	5.4	5.4	5.4	5.4
	-12.6	-13.0	5.7	5.7	5.7	5.7	5.7	5.7
	-10.5	-11.0	6.0	6.0	6.0	6.0	6.0	5.9
	-9.5	-10.0	6.1	6.1	6.1	6.1	6.1	6.1
	-8.5	-9.1	6.3	6.3	6.2	6.2	6.2	6.2
	-7.0	-7.6	6.5	6.5	6.4	6.4	6.4	6.4
	-5.0	-5.6	6.8	6.7	6.7	6.7	6.7	6.7
	-3.0	-3.7	7.0	7.0	7.0	7.0	7.0	7.0
	0.0	-0.7	7.5	7.4	7.4	7.4	7.4	7.0
	3.0	2.2	7.9	7.8	7.8	7.7	7.5	7.0
	5.0	4.1	8.1	8.1	8.0	7.7	7.5	7.0
	7.0	6.0	8.4	8.4	8.0	7.7	7.5	7.0
80	9.0	7.9	8.7	8.5	8.0	7.7	7.5	7.0
	11.0	9.8	8.9	8.5	8.0	7.7	7.5	7.0
	13.0	11.8	9.0	8.5	8.0	7.7	7.5	7.0
	15.0	13.7	9.0	8.5	8.0	7.7	7.5	7.0
	-19.8	-20.0	5.9	5.9	5.9	5.9	5.9	5.8
	-18.8	-19.0	6.1	6.1	6.0	6.0	6.0	6.0
	-16.7	-17.0	6.4	6.4	6.4	6.4	6.4	6.4
	-14.7	-15.0	6.8	6.8	6.8	6.7	6.7	6.7
	-12.6	-13.0	7.1	7.1	7.1	7.1	7.1	7.1
	-10.5	-11.0	7.5	7.5	7.5	7.5	7.4	7.4
	-9.5	-10.0	7.7	7.7	7.6	7.6	7.6	7.6
	-8.5	-9.1	7.8	7.8	7.8	7.8	7.8	7.8
	-7.0	-7.6	8.1	8.1	8.1	8.1	8.0	8.0
	-5.0	-5.6	8.4	8.4	8.4	8.4	8.4	8.4
	-3.0	-3.7	8.8	8.8	8.7	8.7	8.7	8.7
100	0.0	-0.7	9.3	9.3	9.3	9.3	9.3	8.7
	3.0	2.2	9.8	9.8	9.8	9.7	9.4	8.7
	5.0	4.1	10.2	10.1	10.0	9.7	9.4	8.7
	7.0	6.0	10.5	10.5	10.0	9.7	9.4	8.7
	9.0	7.9	10.8	10.6	10.0	9.7	9.4	8.7
	11.0	9.8	11.2	10.6	10.0	9.7	9.4	8.7
	13.0	11.8	11.3	10.6	10.0	9.7	9.4	8.7
	15.0	13.7	11.3	10.6	10.0	9.7	9.4	8.7
	-19.8	-20.0	7.4	7.4	7.3	7.3	7.3	7.3
	-18.8	-19.0	7.6	7.6	7.6	7.5	7.5	7.5
	-16.7	-17.0	8.0	8.0	8.0	8.0	8.0	8.0
	-14.7	-15.0	8.5	8.5	8.4	8.4	8.4	8.4
	-12.6	-13.0	8.9	8.9	8.9	8.9	8.9	8.8
	-10.5	-11.0	9.4	9.3	9.3	9.3	9.3	9.3
	-9.5	-10.0	9.6	9.6	9.5	9.5	9.5	9.5
125	-8.5	-9.1	9.8	9.8	9.7	9.7	9.7	9.7
	-7.0	-7.6	10.1	10.1	10.1	10.1	10.1	10.0
	-5.0	-5.6	10.6	10.5	10.5	10.5	10.5	10.5
	-3.0	-3.7	11.0	11.0	10.9	10.9	10.9	10.9
	0.0	-0.7	11.6	11.6	11.6	11.6	11.6	10.9
	3.0	2.2	12.3	12.3	12.2	12.1	11.7	10.9
	5.0	4.1	12.7	12.7	12.5	12.1	11.7	10.9
	7.0	6.0	13.1	13.1	12.5	12.1	11.7	10.9
	9.0	7.9	13.5	13.3	12.5	12.1	11.7	10.9
	11.0	9.8	14.0	13.3	12.5	12.1	11.7	10.9
	13.0	11.8	14.1	13.3	12.5	12.1	11.7	10.9
	15.0	13.7	14.1	13.3	12.5	12.1	11.7	10.9
	-19.8	-20.0	9.4	9.4	9.4	9.4	9.4	9.3
	-18.8	-19.0	9.7	9.7	9.7	9.7	9.6	9.6
	-16.7	-17.0	10.3	10.3	10.2	10.2	10.2	10.2
140	-14.7	-15.0	10.9	10.8	10.8	10.8	10.8	10.7
	-12.6	-13.0	11.4	11.4	11.4	11.4	11.3	11.3
	-10.5	-11.0	12.0	12.0	11.9	11.9	11.9	11.9
	-9.5	-10.0	12.3	12.2	12.2	12.2	12.2	12.2
	-8.5	-9.1	12.5	12.5	12.5	12.5	12.4	12.4
	-7.0	-7.6	13.0	12.9	12.9	12.9	12.9	12.8
	-5.0	-5.6	13.5	13.5	13.5	13.4	13.4	13.4
	-3.0	-3.7	14.1	14.0	14.0	14.0	14.0	13.9
	0.0	-0.7	14.9	14.9	14.8	14.8	14.8	13.9
	3.0	2.2	15.7	15.7	15.7	15.5	15.0	13.9
	5.0	4.1	16.3	16.2	16.0	15.5	15.0	13.9
	7.0	6.0	16.8	16.8	16.0	15.5	15.0	13.9
	9.0	7.9	17.3	17.0	16.0	15.5	15.0	13.9
	11.0	9.8	17.9	17.0	16.0	15.5	15.0	13.9
	13.0	11.8	18.1	17.0	16.0	15.5	15.0	13.9
15.0	13.7	18.1	17.0	16.0	15.5	15.0	13.9	
-19.8	-20.0	10.6	10.6	10.6	10.6	10.5	10.5	
-18.8	-19.0	10.9	10.9	10.9	10.9	10.9	10.8	
-16.7	-17.0	11.6	11.6	11.5	11.5	11.5	11.5	
-14.7	-15.0	12.2	12.2	12.2	12.1	12.1	12.1	
-12.6	-13.0	12.9	12.8	12.8	12.8	12.8	12.7	
-10.5	-11.0	13.5	13.5	13.4	13.4	13.4	13.4	
-9.5	-10.0	13.8	13.8	13.7	13.7	13.7	13.7	
-8.5	-9.1	14.1	14.1	14.0	14.0	14.0	14.0	
-7.0	-7.6	14.6	14.5	14.5	14.5	14.5	14.4	
-5.0	-5.6	15.2	15.2	15.1	15.1	15.1	15.1	
-3.0	-3.7	15.8	15.8	15.7	15.7	15.7	15.7	
0.0	-0.7	16.8	16.7	16.7	16.7	16.7	15.7	
3.0	2.2	17.7	17.7	17.6	17.4	16.8	15.7	
5.0	4.1	18.3	18.3	18.0	17.4	16.8	15.7	
7.0	6.0	18.9	18.9	18.0	17.4	16.8	15.7	
9.0	7.9	19.5	19.2	18.0	17.4	16.8	15.7	
11.0	9.8	20.1	19.2	18.0	17.4	16.8	15.7	
13.0	11.8	20.3	19.2	18.0	17.4	16.8	15.7	
15.0	13.7	20.3	19.2	18.0	17.4	16.8	15.7	


7 Dimensional drawings

7 - 1 Dimensional Drawings with Accessories

FXFQ-B

Notes

1. Location of nameplate
The unit nameplate is located on the control box cover.
The decoration panel nameplate is located on the piping-side panel frame, under the corner cover.
2. When installing optional accessories, refer to their respective documentation.
3. Make sure the distance between the ceiling and the cassette does not exceed 35 mm.
The maximum ceiling opening is 910 mm.
4. When the conditions in the ceiling exceed 30°C ambient temperature and 80% relative humidity, or when fresh air is inducted into the ceiling, additional insulation is required (polyethylene foam, thickness ≥ 10 mm).
5. When installing a sensor kit, there will be a sensor on this location. For details, see the drawing of the sensor kit.
6. When installing a wireless controller, there will be a receiver on this location. For details, see the drawing of the wireless controller.

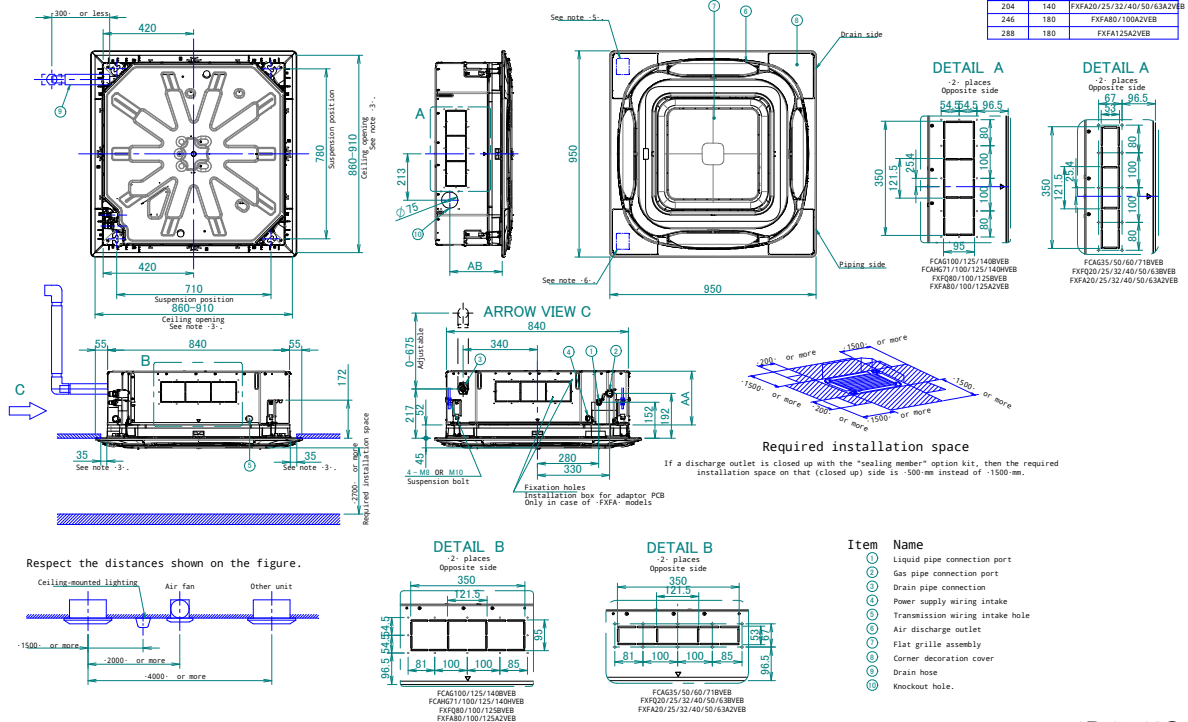


2D121703C

FXFQ-B

Notes

1. Location of nameplate
The unit nameplate is located on the control box cover.
The decoration panel nameplate is located on the piping-side panel frame, under the corner cover.
2. When installing optional accessories, refer to their respective documentation.
3. Make sure the distance between the ceiling and the cassette does not exceed 35 mm.
The maximum ceiling opening is 910 mm.
4. When the conditions in the ceiling exceed 30°C ambient temperature and 80% relative humidity, or when fresh air is inducted into the ceiling, additional insulation is required (polyethylene foam, thickness ≥ 10 mm).
5. When installing a sensor kit, there will be a sensor on this location. For details, see the drawing of the sensor kit.
6. When installing a wireless controller, there will be a receiver on this location. For details, see the drawing of the wireless controller.

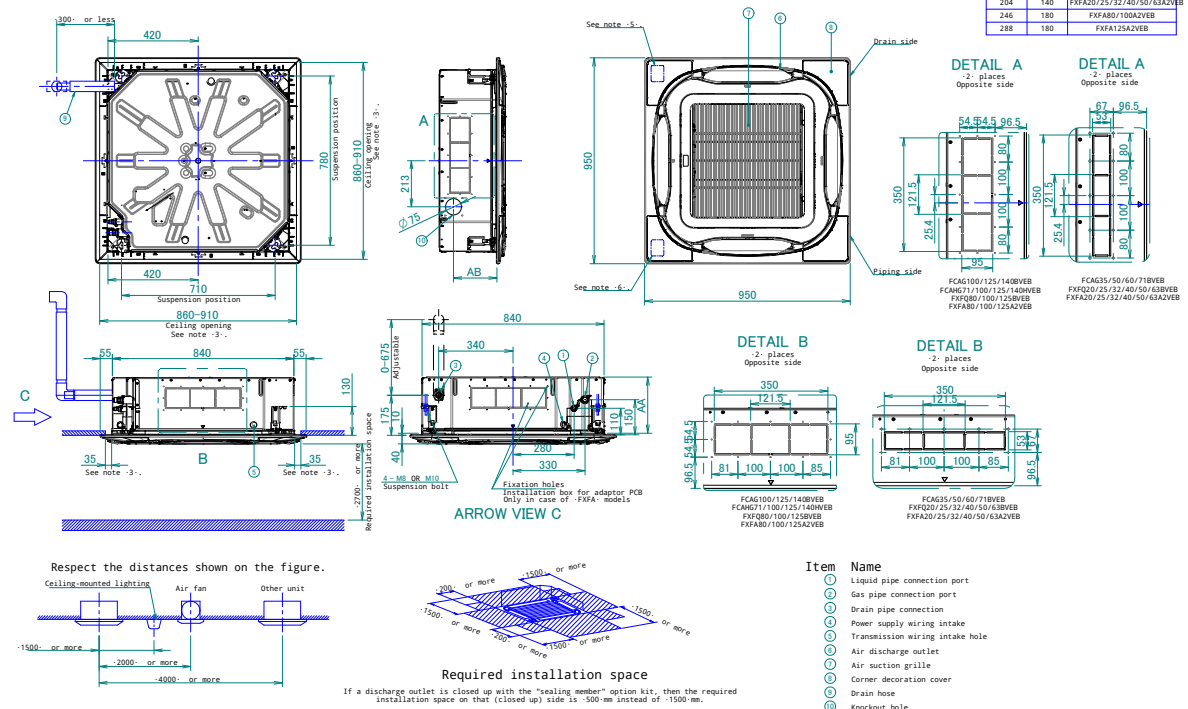

2D121655C


7 Dimensional drawings

7 - 1 Dimensional Drawings with Accessories

FXFQ-B

Notes

1. Location of nameplate
The unit nameplate is located on the control box cover.
The decoration panel nameplate is located on the piping-side panel frame, under the corner cover.
2. When installing optional accessories, refer to their respective documentation.
3. Make sure the distance between the ceiling and the cassette does not exceed 35 mm.
The maximum ceiling opening is 910 mm.
4. When the conditions in the ceiling exceed 30°C ambient temperature and 80% relative humidity, or when fresh air is induced into the ceiling, additional insulation is required (polyethylene foam, thickness ≥ 10 mm).
5. When installing a sensor kit, there will be a sensor on this location. For details, see the drawing of the sensor kit. See note 5.

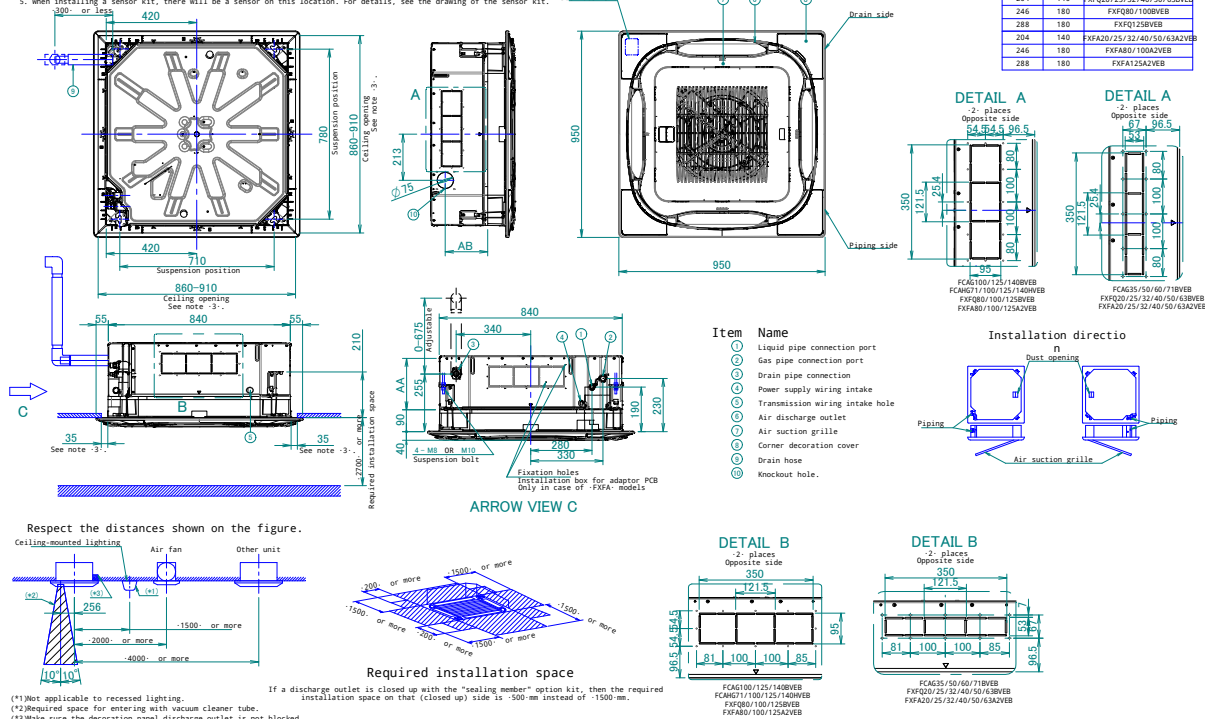


2D121658C

7 Dimensional drawings

7 - 1 Dimensional Drawings with Accessories

FXFQ-B

Installation methods

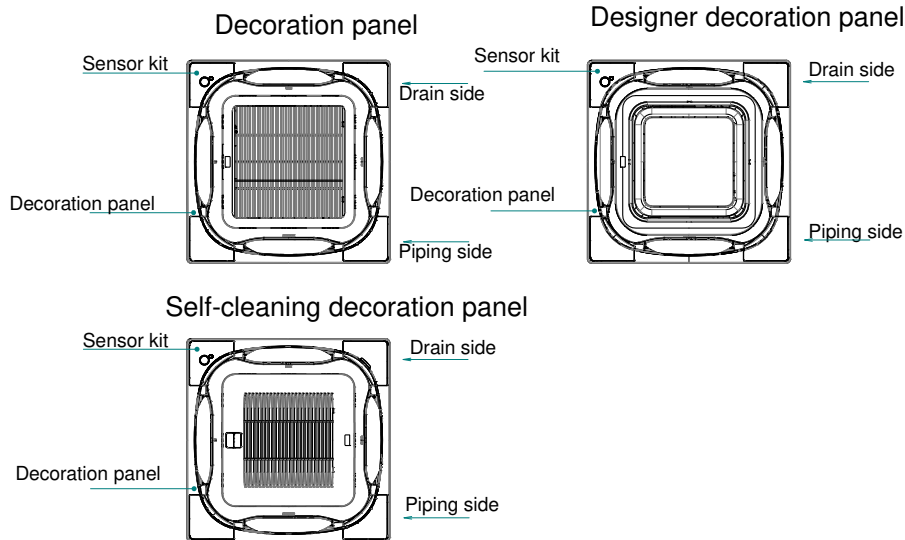


Front panel	Model name	Option
Decoration panel	BYCQ140E2W1(W)	BRYQ140B8
	BYCQ140E2W1B	BRYQ140B8B
Self-cleaning decoration panel	BYCQ140E2GFW1	BRYQ140B8
	BYCQ140E2GFW1B	BRYQ140B8B
Designer decoration panel	BYCQ140E2P	BRYQ140C8
	BYCQ140E2PB	BRYQ140C8B

3D121755

FXIQ-B



Installation methods

Remote control dimensions



Remote control holder

Installation methods
Installation to wall surface

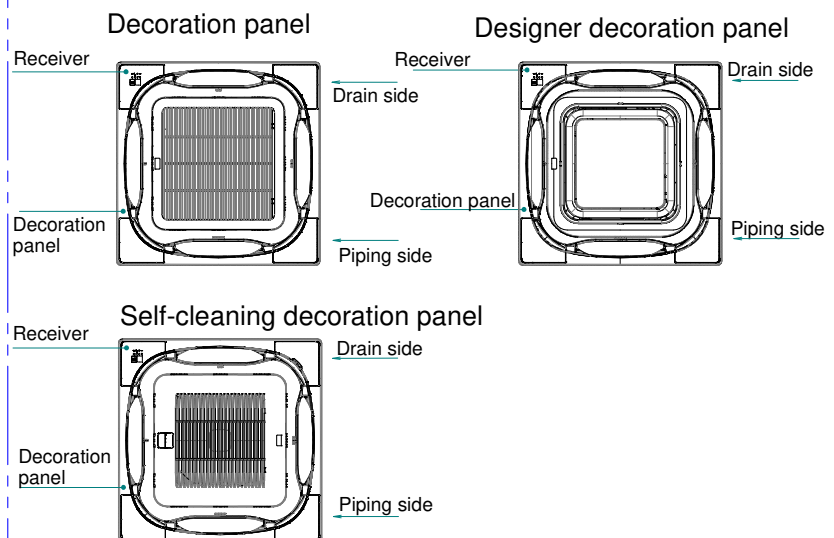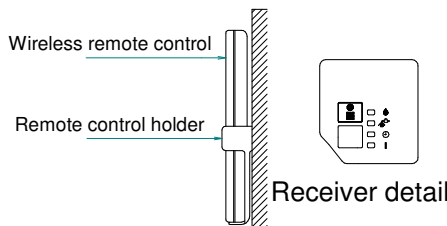



Front panel	Model name	Option
Decoration panel	BYCQ140E2W1(W)	BRC7FA532F
	BYCQ140E2W1B	BRC7FA532FB
Self-cleaning decoration panel	BYCQ140E2GFW1	BRC7FA532F
	BYCQ140E2GFW1B	BRC7FA532FB
Designer decoration panel	BYCQ140E2P	BRC7FB532F
	BYCQ140E2PB	BRC7FB532FB

3D121750


7 Dimensional drawings

7 - 2 Dimensional Drawings with Fresh Air Intake



FXFQ-B

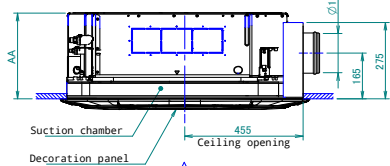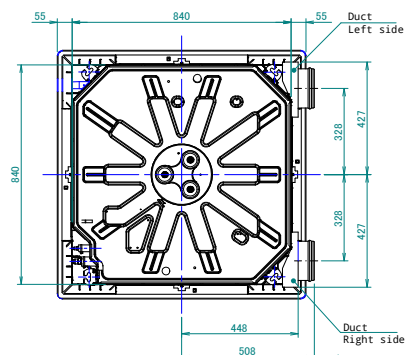


A

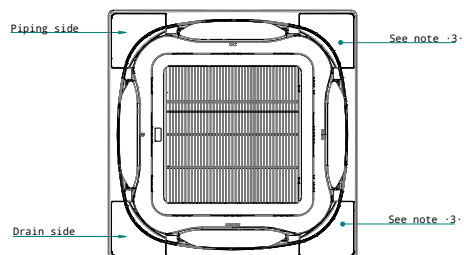

View A

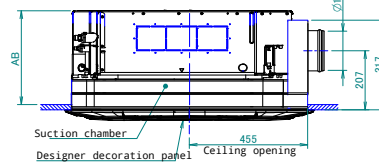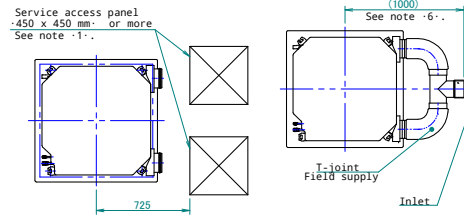

AA	AB	Model name
264	306	FCAG35/50/60/71BVEB FXFQ20/25/32/40/50/63BVEB FXFA20/25/32/40/50/63A2VEB
306	348	FCAG100/125/140BVEB FXFQ80/100BVEB FXFA80/100A2VEB
348	390	FCAHG71/100/125/140HVEB FXFQ125BVEB FXFA125A2VEB



Notes


- When installing a fresh air intake kit, provide a service access panel.
- Field construction
- This corner discharge outlet needs to be closed.
- When installing a duct fan, use a wiring adapter to link the duct fan to the fan of the indoor unit.
- The intake air flow rate is recommended to be ≤20% of the air flow rate at high fan speed.
If the intake air flow rate is too large, the operating sound may increase, and the detection of the indoor unit suction temperature may be affected.
- This indicates the distance between the T-joint inlet and the indoor unit inlet when the T-tube is connected.

3D121741A

8 Centre of gravity

8 - 1 Centre of Gravity

FXFQ-B

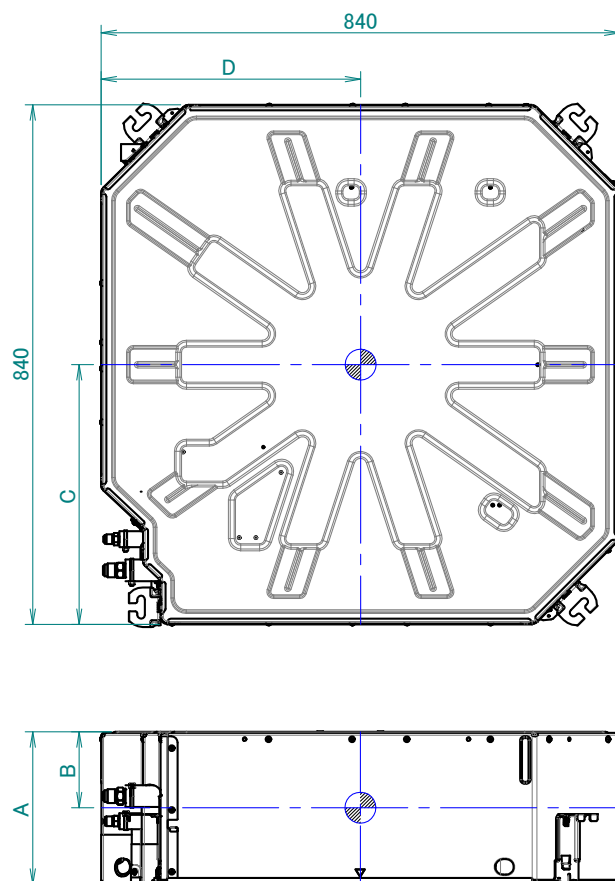


Model	A	B	C	D
FCAG35~71BVEB	204	70	400	405
FCAG100~140BVEB	246	100	400	405
FCAG71~140HVEB	288	135	400	405
FXFQ20~63BVEB, FXFA20~63A2VEB	204	70	395	400
FXFQ80~100BVEB, FXFA80~100A2VEB	246	100	395	400
FXFQ125BVEB, FXFA125A2VEB	288	135	395	400

4D121659A

9 Piping diagrams

9 - 1 Piping Diagrams

FXFQ-B

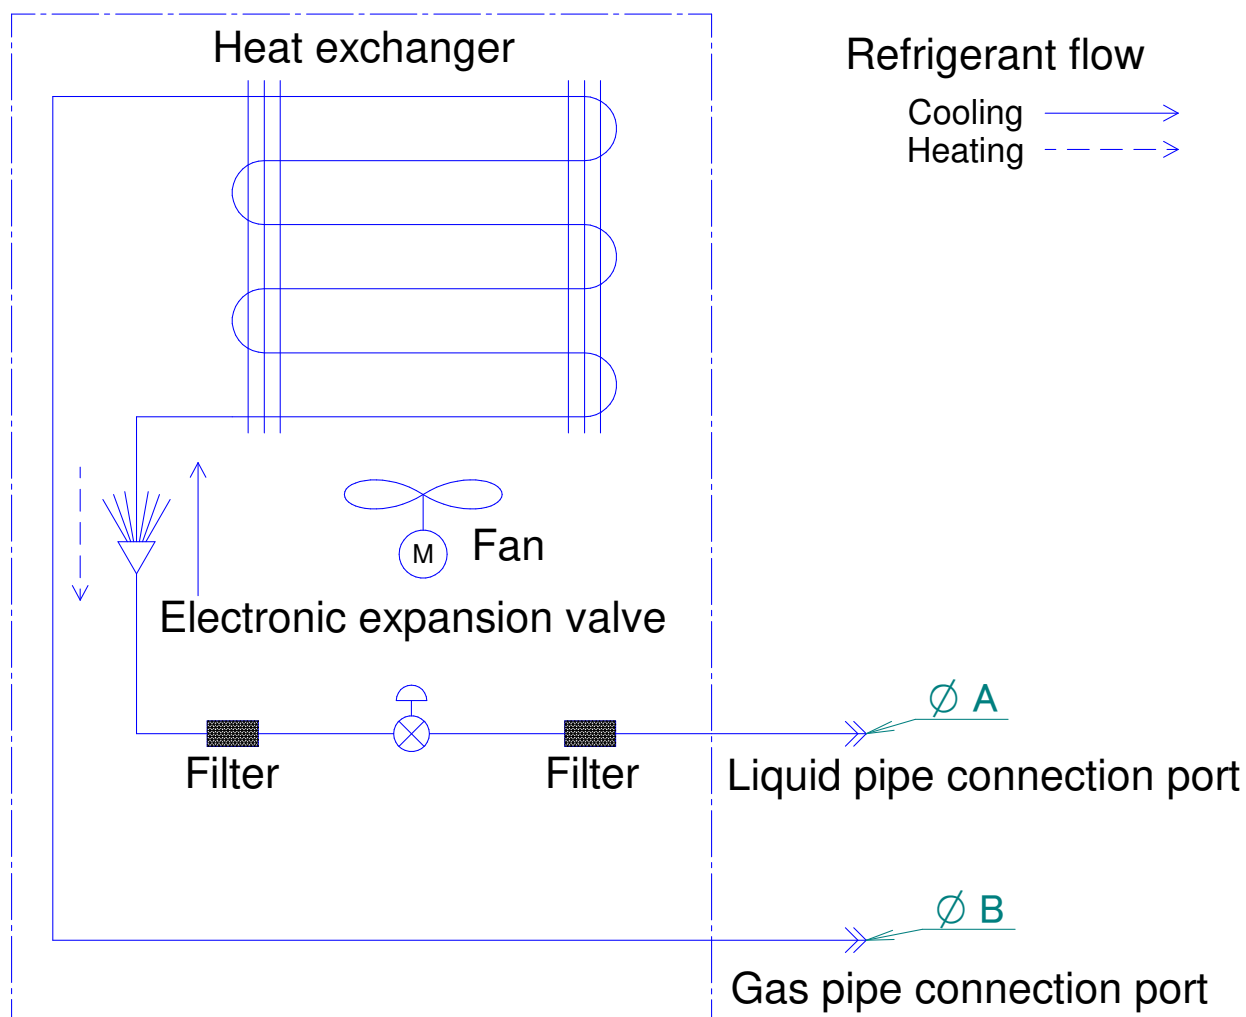


Model	A	B
FXFQ20BVEB	6.35	12.7
FXFQ25BVEB		
FXFQ32BVEB		
FXFQ40BVEB		
FXFQ50BVEB		
FXFQ63BVEB	9.52	15.9
FXFQ80BVEB		
FXFQ100BVEB		
FXFQ125BVEB		

4D121434

10 Wiring diagrams

10 - 1 Wiring Diagrams - Single Phase

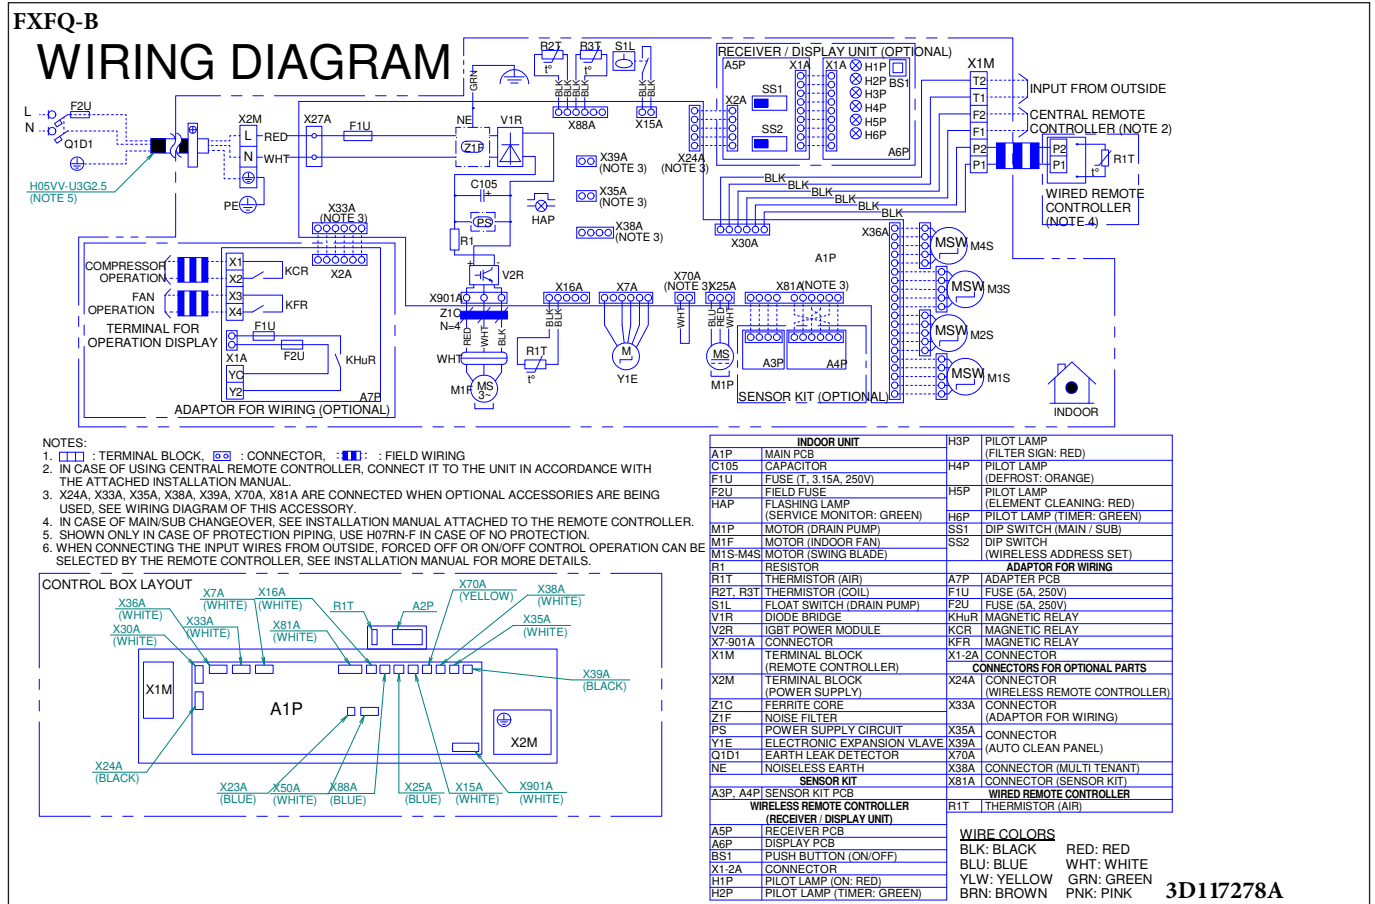


11 Sound data

11 - 1 Sound Pressure Spectrum

11

FXFQ20B

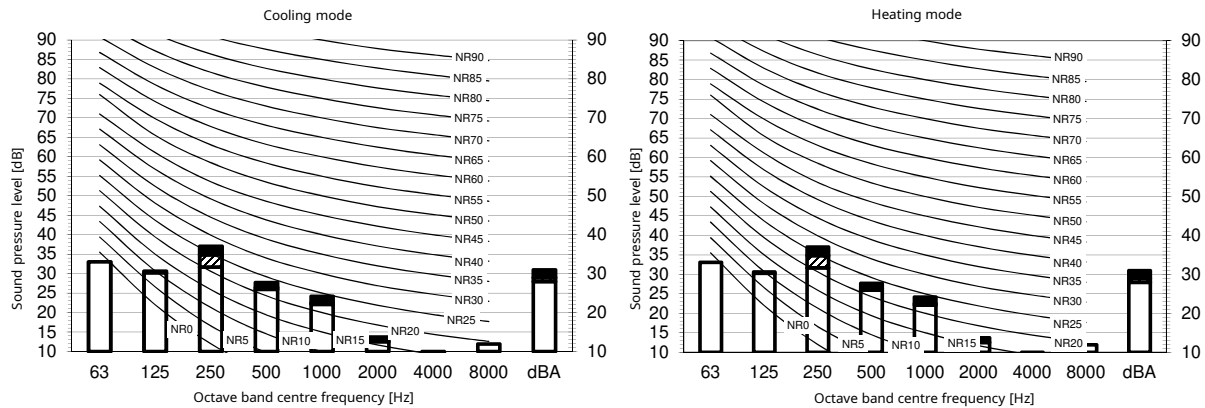


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale Fan speed

B High
C Medium
D Low

Location of microphone




Cooling Total dB				Heating Total dB			
A	B	C	D	A	B	C	D
dBA	31,0	29,0	28,0	dBA	31,0	29,0	28,0

Notes

- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

3D121671A

FXFQ25B

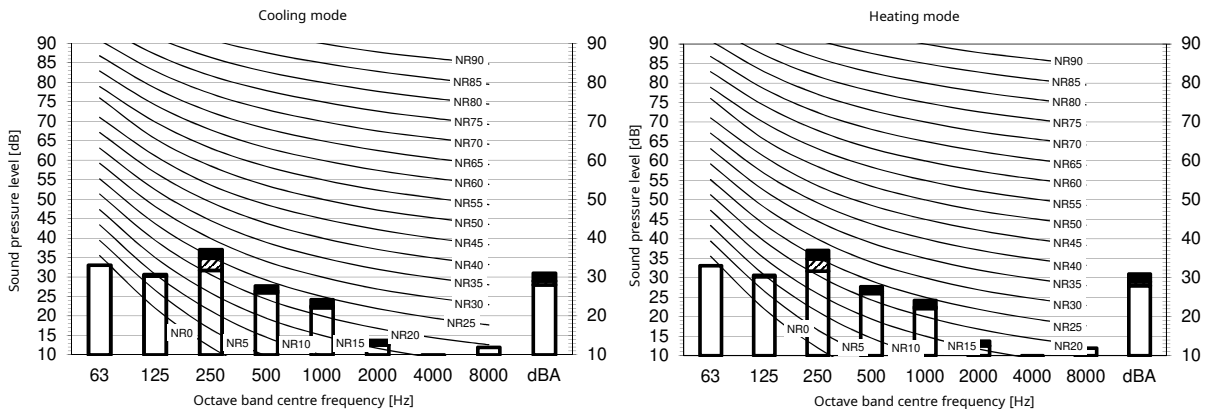


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale Fan speed

B High
C Medium
D Low

Location of microphone



Cooling Total dB				Heating Total dB			
A	B	C	D	A	B	C	D
dBA	31,0	29,0	28,0	dBA	31,0	29,0	28,0

Notes


- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

3D121672A

11 Sound data

11 - 1 Sound Pressure Spectrum

FXFQ32B

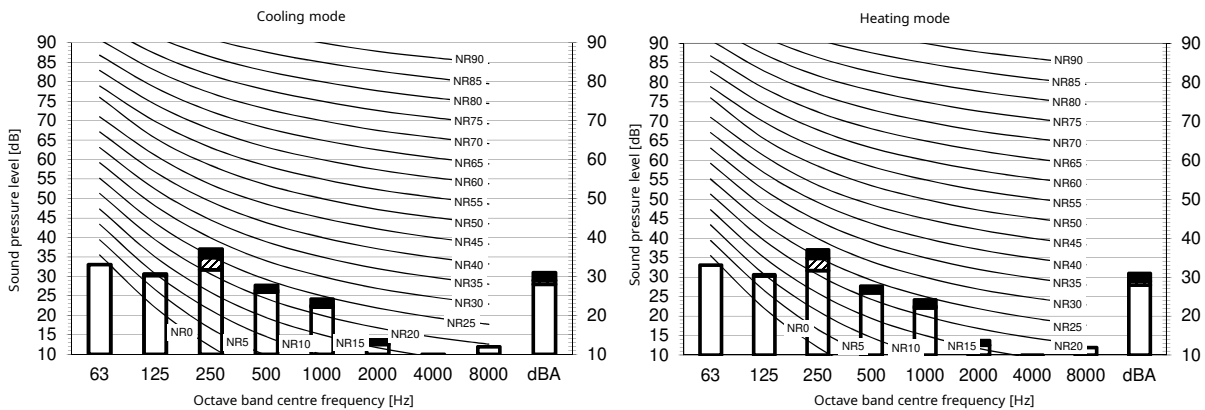


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale Fan speed

B High
C Medium
D Low

Location of microphone



Cooling	Total dB			
A	B	C	D	
dBA	31,0	29,0	28,0	


Heating	Total dB			
A	B	C	D	
dBA	31,0	29,0	28,0	

Notes

- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

3D121673A

FXIQ40B

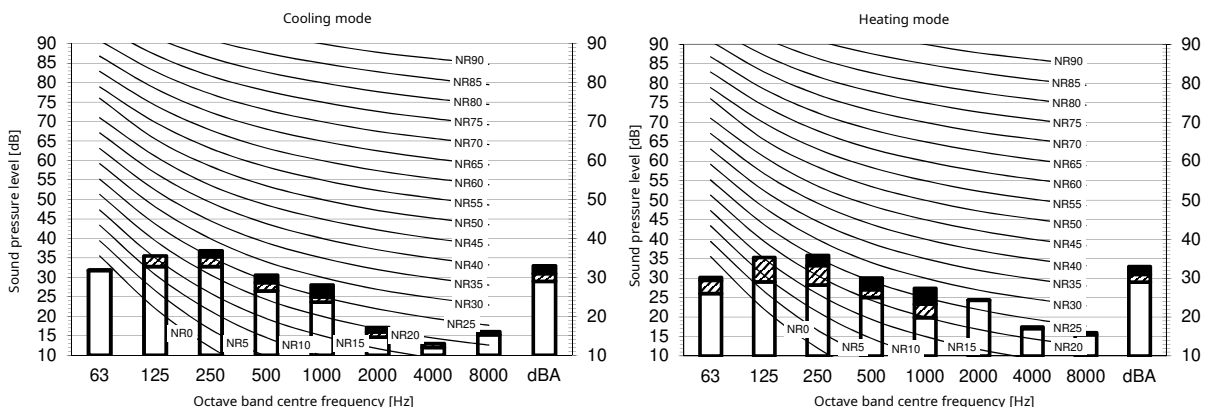


Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale Fan speed

B High
C Medium
D Low

Location of microphone



Cooling	Total dB			
A	B	C	D	
dBA	33,0	31,0	29,0	

Heating	Total dB			
A	B	C	D	
dBA	33,0	31,0	29,0	

Notes


- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

3D121674A

11 Sound data

11 - 1 Sound Pressure Spectrum

FXFQ50B

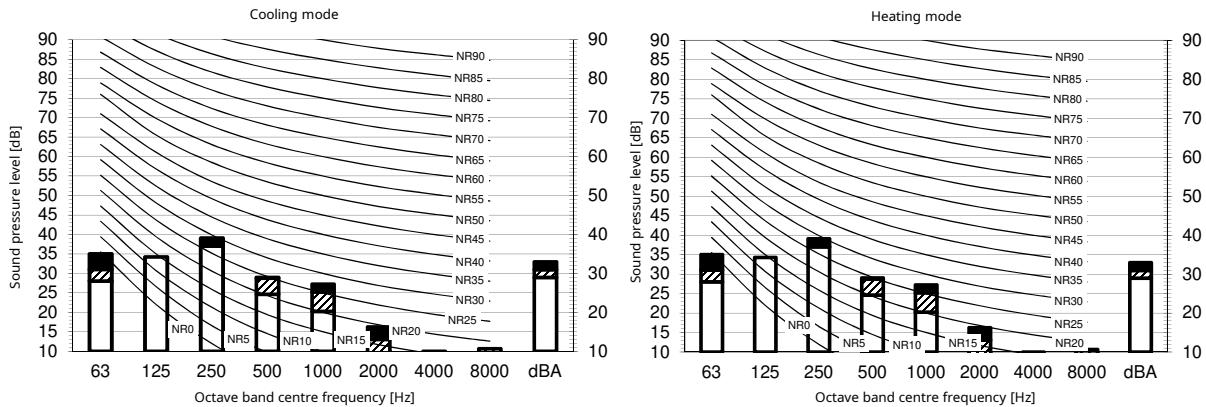


Legend
dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale Fan speed

B High
C Medium
D Low

Location of microphone




Cooling	Total dB			
A	B	C	D	
dBA	33,0	31,0	29,0	

Heating	Total dB			
A	B	C	D	
dBA	33,0	31,0	29,0	

- Notes
- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
 - Background noise already taken into account.
 - Operating noise varies depending on operation and ambient conditions.
 - The operation noise measuring method is in accordance with JISC9612.
 - Measuring location: anechoic chamber

3D121675A

FXFQ63B

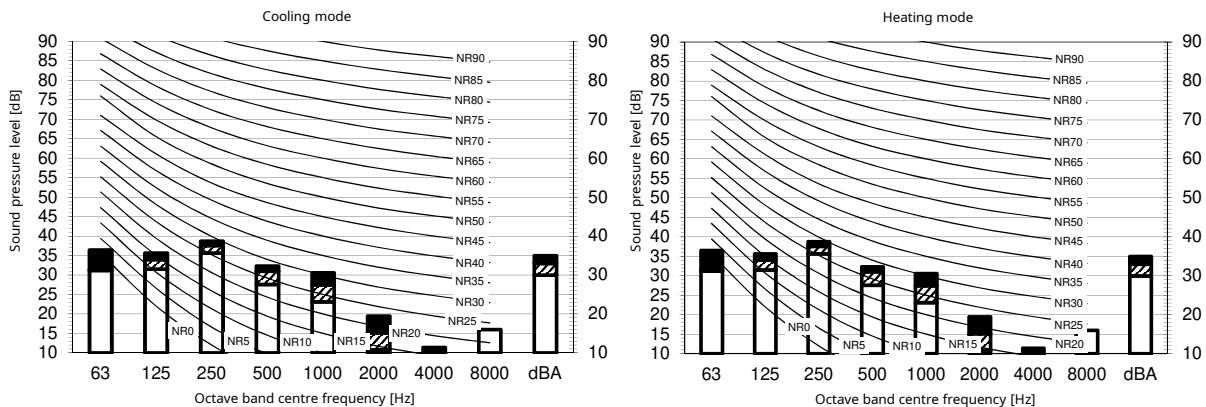


Legend
dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale Fan speed

B High
C Medium
D Low

Location of microphone



Cooling	Total dB			
A	B	C	D	
dBA	35,0	33,0	30,0	

Heating	Total dB			
A	B	C	D	
dBA	35,0	33,0	30,0	


- Notes
- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
 - Background noise already taken into account.
 - Operating noise varies depending on operation and ambient conditions.
 - The operation noise measuring method is in accordance with JISC9612.
 - Measuring location: anechoic chamber

3D121676A

11 Sound data

11 - 1 Sound Pressure Spectrum

FXFQ80B

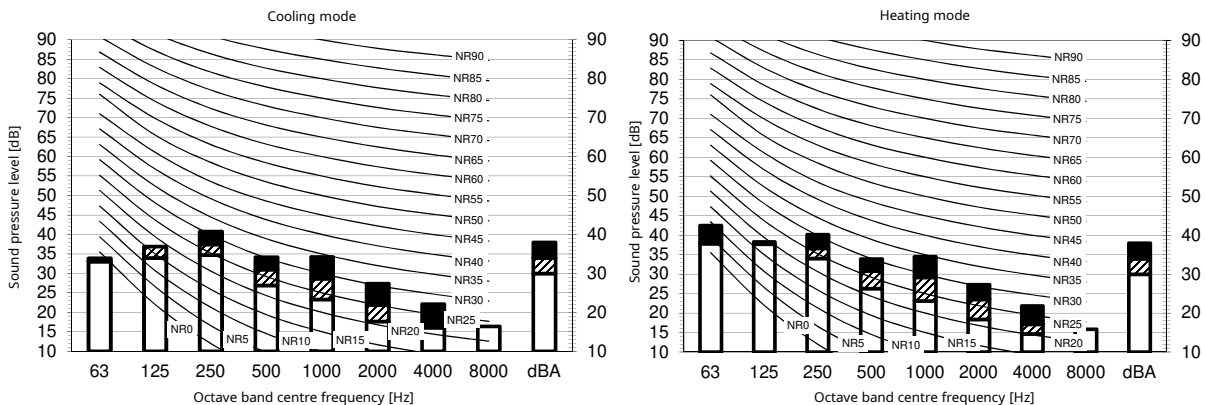


Cooling Total dB			
A	B	C	D
dBA	38,0	34,0	30,0

Heating Total dB			
A	B	C	D
dBA	38,0	34,0	30,0

- Notes
- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
 - Background noise already taken into account.
 - Operating noise varies depending on operation and ambient conditions.
 - The operation noise measuring method is in accordance with JISC9612.
 - Measuring location: anechoic chamber

3D121677A

FXFQ100B

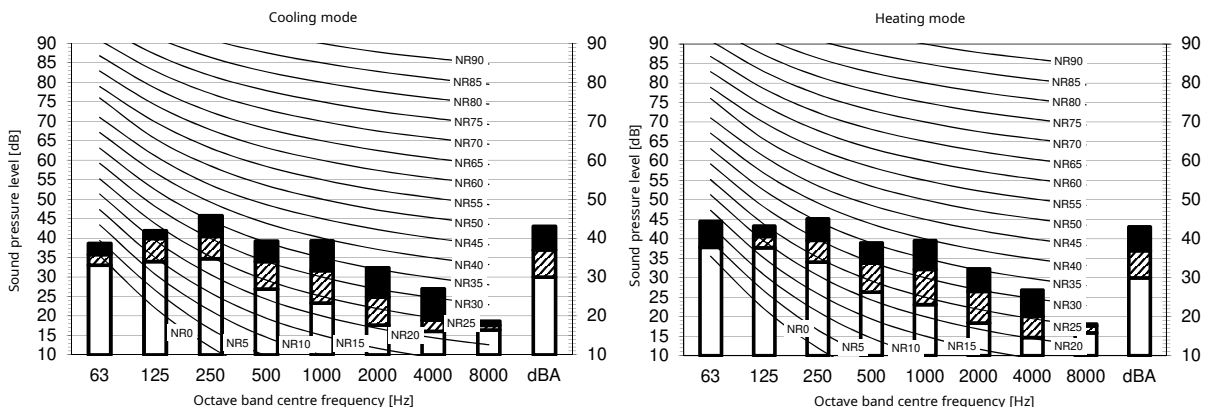

Cooling Total dB			
A	B	C	D
dBA	43,0	37,0	30,0

Heating Total dB			
A	B	C	D
dBA	43,0	37,0	30,0


- Notes
- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
 - Background noise already taken into account.
 - Operating noise varies depending on operation and ambient conditions.
 - The operation noise measuring method is in accordance with JISC9612.
 - Measuring location: anechoic chamber

3D121678A

11 Sound data

11 - 1 Sound Pressure Spectrum

FXFQ125B

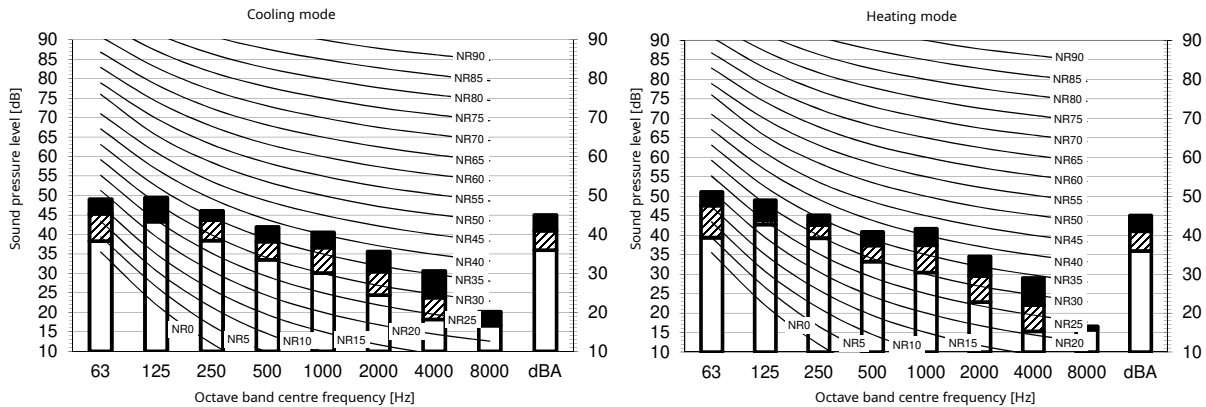

Cooling Total dB				Heating Total dB			
A	B	C	D	A	B	C	D
dBA	45,0	41,0	36,0	dBA	45,0	41,0	36,0

- Notes
- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
 - Background noise already taken into account.
 - Operating noise varies depending on operation and ambient conditions.
 - The operation noise measuring method is in accordance with JISC9612.
 - Measuring location: anechoic chamber

3D121679A

12 Air flow patterns


12 - 1 Air flow pattern - Cooling and Heating

12

FXFQ20-32B


Air velocity distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

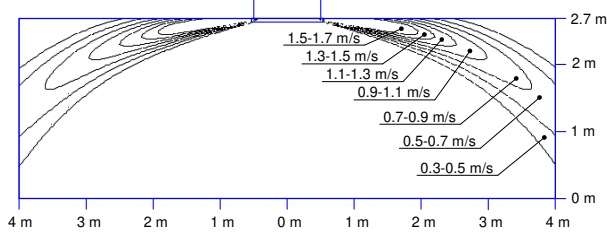


Air temperature distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

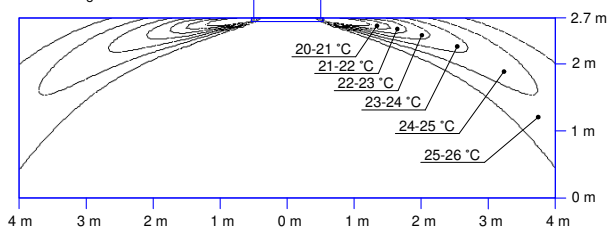


Air velocity distribution (heating)

Air flow direction: vertical
Air discharge: all-round

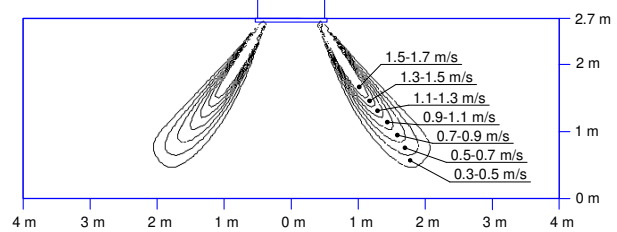

Air temperature distribution (heating)

Air flow direction: vertical
Air discharge: all-round

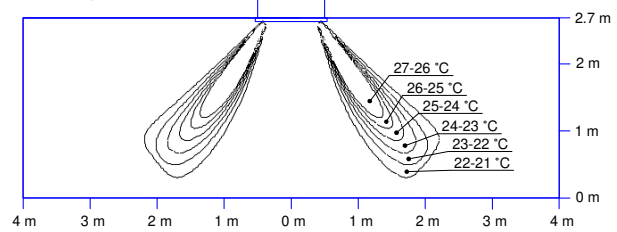


3D121627A

FXFQ40B


Air velocity distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

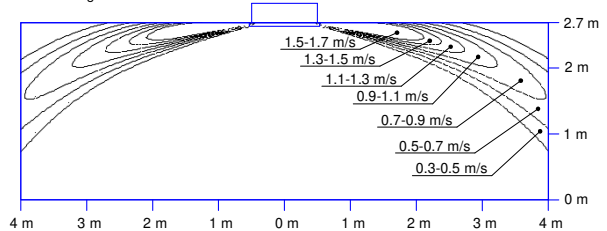


Air temperature distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

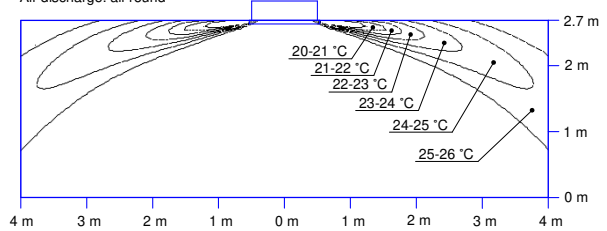


Air velocity distribution (heating)

Air flow direction: vertical
Air discharge: all-round

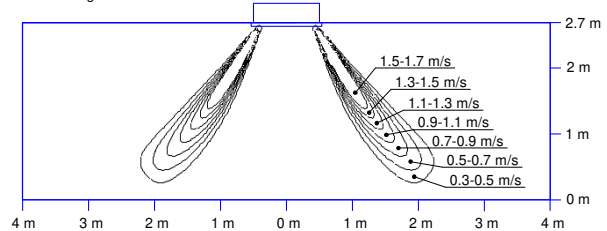

Air temperature distribution (heating)

Air flow direction: vertical
Air discharge: all-round

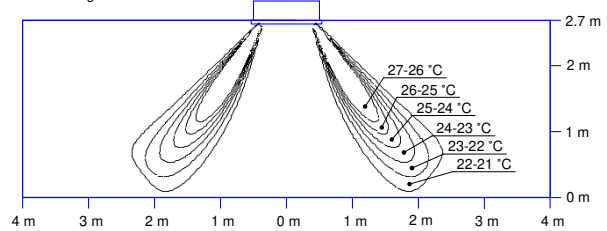

3D121620A

12 Air flow patterns


12 - 1 Air flow pattern - Cooling and Heating

12

FXFQ50B


Air velocity distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

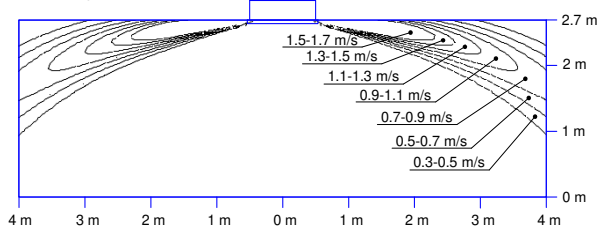


Air temperature distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

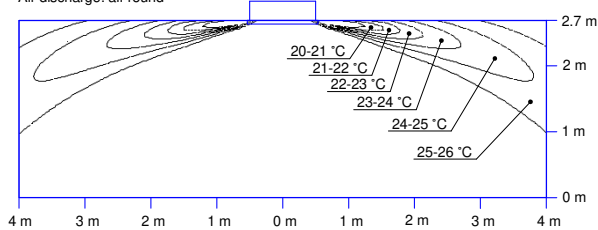


Air velocity distribution (heating)

Air flow direction: vertical
Air discharge: all-round

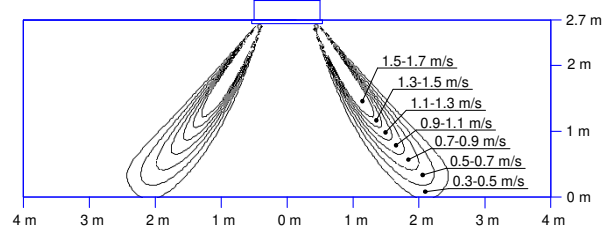

Air temperature distribution (heating)

Air flow direction: vertical
Air discharge: all-round

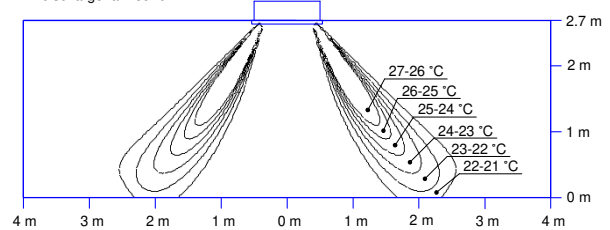


3D12I621A

FXFQ63B


Air velocity distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

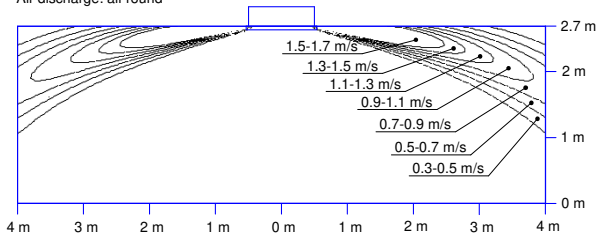


Air temperature distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

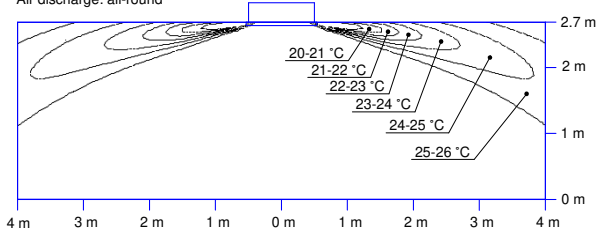


Air velocity distribution (heating)

Air flow direction: vertical
Air discharge: all-round

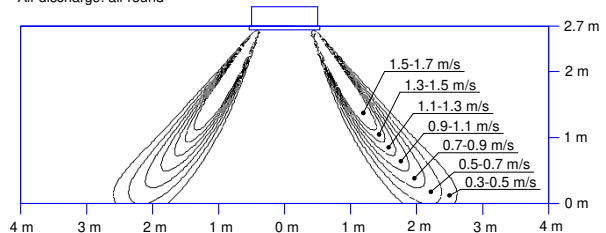

Air temperature distribution (heating)

Air flow direction: vertical
Air discharge: all-round

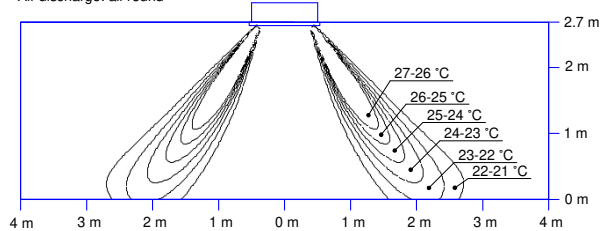

3D12I628A


12 Air flow patterns

12 - 1 Air flow pattern - Cooling and Heating

FXFQ80B


Air velocity distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

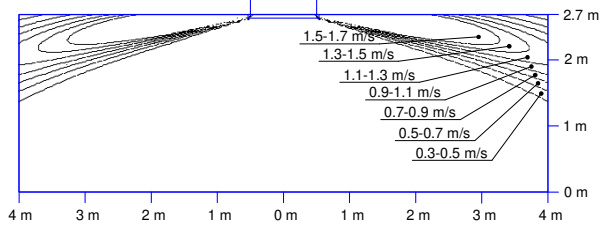


Air temperature distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

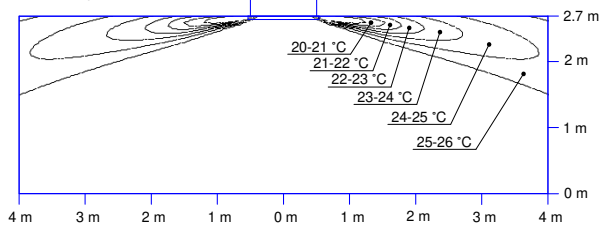


Air velocity distribution (heating)

Air flow direction: vertical
Air discharge: all-round

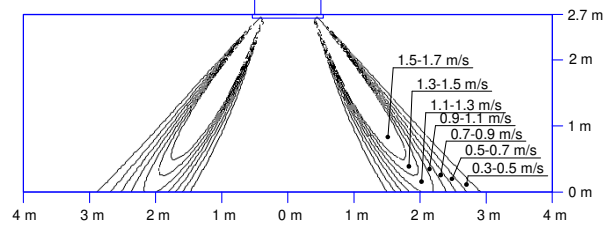

Air temperature distribution (heating)

Air flow direction: vertical
Air discharge: all-round

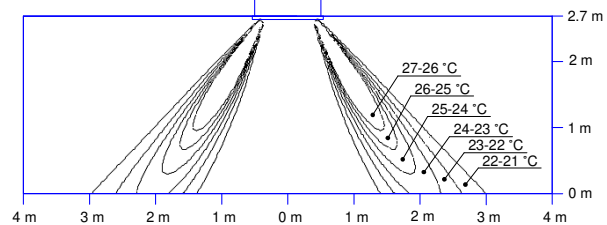


3D121622A

FXFQ100B


Air velocity distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

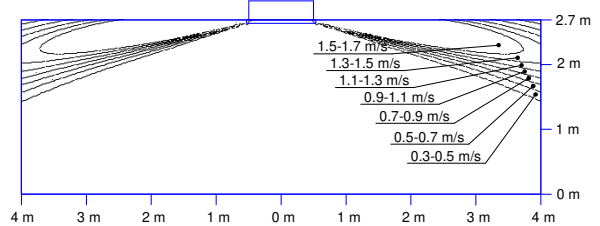


Air temperature distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

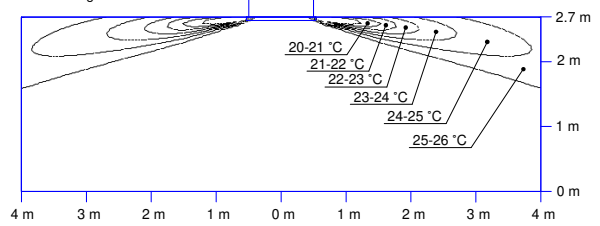


Air velocity distribution (heating)

Air flow direction: vertical
Air discharge: all-round

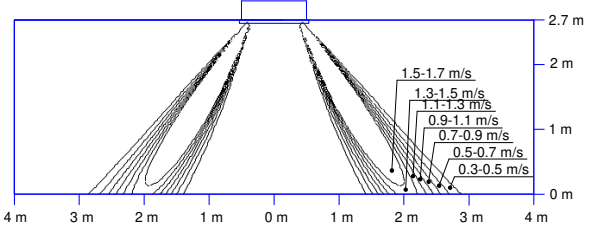

Air temperature distribution (heating)

Air flow direction: vertical
Air discharge: all-round

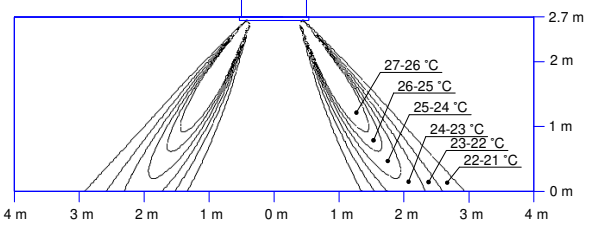

3D121629A

12 Air flow patterns


12 - 1 Air flow pattern - Cooling and Heating

FXFQ125B

12


Air velocity distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

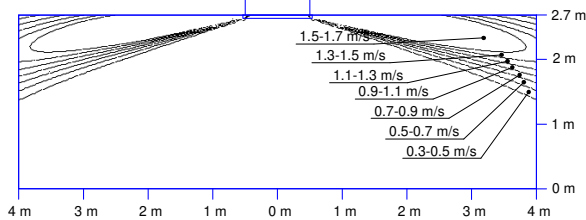


Air temperature distribution (cooling)

Air flow direction: horizontal
Air discharge: all-round

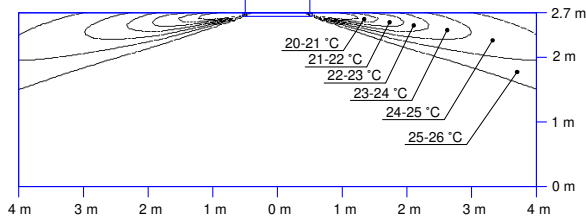


Air velocity distribution (heating)

Air flow direction: vertical
Air discharge: all-round

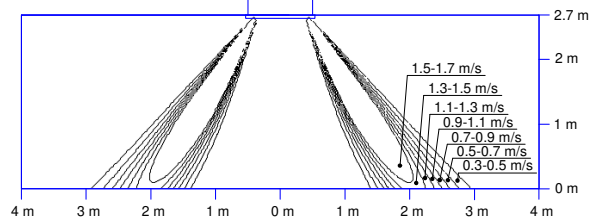


Air temperature distribution (heating)

Air flow direction: vertical
Air discharge: all-round

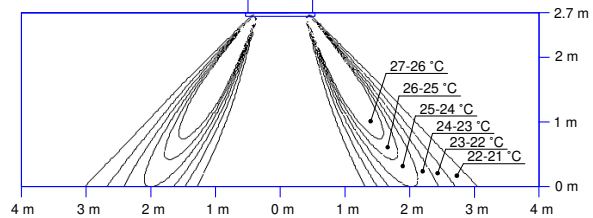

3D121630A



EEDEN21

01/2021



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.